



TOOLS & SYSTEMS


FASTEST[®]



SAFE.
RELIABLE.
FAST.

HVAC-R
SEALING CONNECTION TOOLS

2024 HVAC-R PRODUCT GUIDE

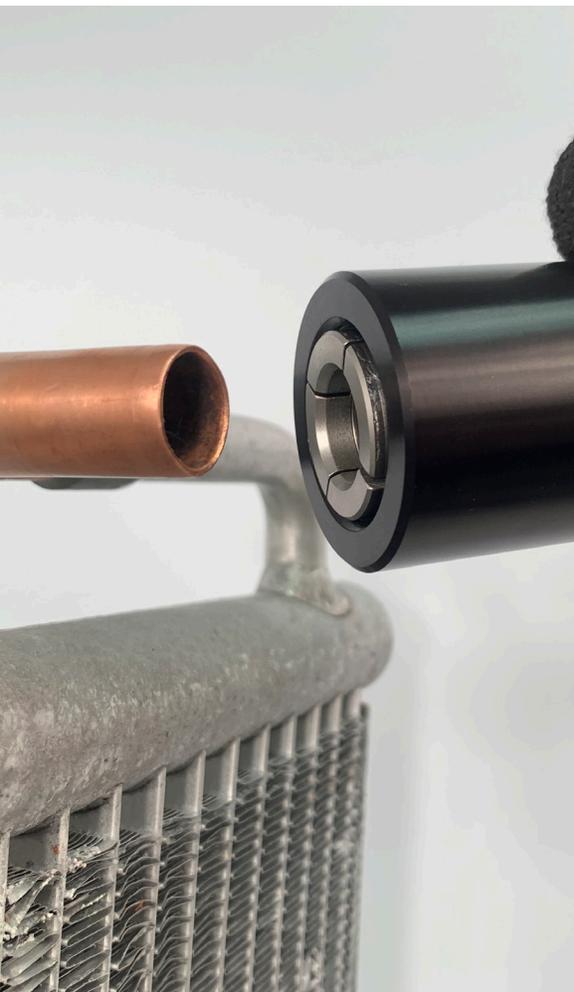



FASTEST®

SAFE, RELIABLE, FAST SEALING CONNECTIONS

Enhance Test Safety | Drive Continuous Improvement | Ensure Product Quality

FasTest® is a dedicated manufacturer of advanced engineered sealing connection tools and process valves that provide improved safety and efficiency - lowering operating costs.

CoreMax® System - p.3

An access valve with matched tooling designed specifically to reduce evacuation times, improve quality, and provide greater throughput, with less maintenance.

Connection Tools - p.9

FasTest® connection tools have become the standard for safe and reliable connection requirements. Ergonomic designs and easy maintenance makes FasTest® the industry preferred source.

Applications

- SPLIT SYSTEMS
- PACKAGE UNITS
- COILS
- COMPRESSORS
- ICE MACHINES
- AND MORE



APPLICATION EXPERTS

We work with you to provide the best solution for your application.



QUALITY

ISO 9001 Certified; Robust tools improve the quality of your product.



BREADTH OF OFFERING

Extensive standard and Custom Engineered Solutions.



INTELLIGENT TOOLS

Industry 4.0 sensing & data generating tools



GLOBAL SUPPORT


Global distribution coverage for local and responsive distribution support.

COREMAX[®] SYSTEM

A Complete Solution for Efficient Refrigerant Processing & Leak Testing of HVAC Systems

The **CoreMax[®]** System eliminates process tubes and Schrader[®] valves for faster evacuation times, improved quality, greater throughput, and less maintenance costs.

Evacuation Time of known Volume

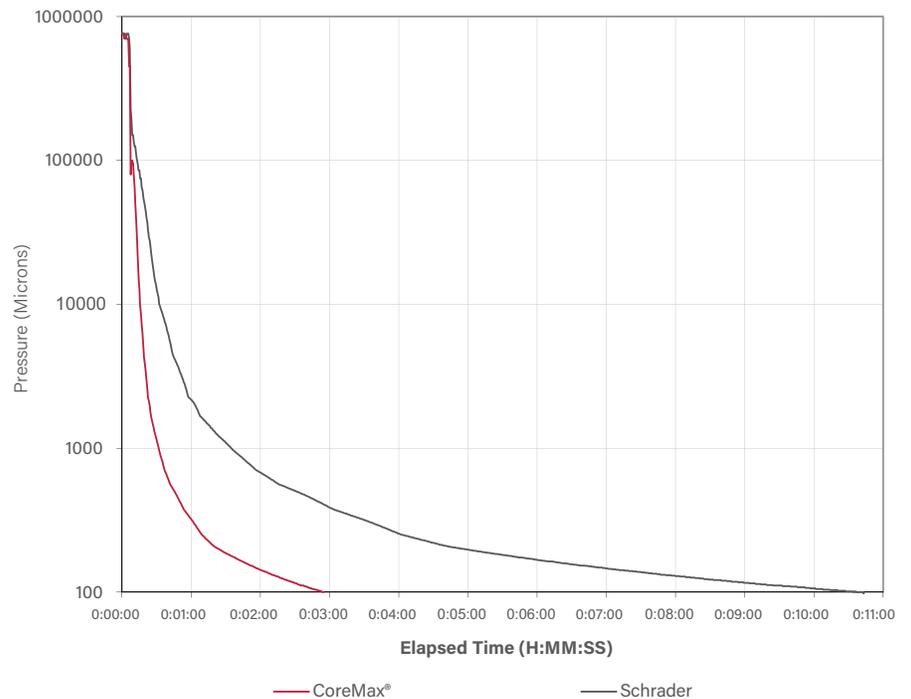


COREMAX BENEFITS

- 1** An entire processing solution for HVAC including tools that has over 20 million units installed in 8 countries and 3 continents
- 2** Eliminates process tubes and Schrader[®] fittings
- 3** Provides increased efficiencies and throughput due to increased flow, resulting in reduced costs
- 4** Provides the largest vacuum conductance in the industry
- 5** Proven family of tools specifically designed for manufacturing and service that reduce plant tooling costs by up to 15%
- 6** Ergonomic tools reduce operator fatigue and overall manufacturing costs
- 7** Robust sealing solution designed specifically for the HVAC industry for sealing longevity and reduced warranty costs
- 8** Reduce rework from leaking Schrader valves by up to 99%
- 9** Conforms to the 7/16-20 45° flare interchangeable standard commonly used for access valves making it field service friendly. Completely compatible with standard refrigeration tooling and connections


- ✓ SPLIT SYSTEMS
- ✓ PACKAGE UNITS
- ✓ COILS
- ✓ COMPRESSORS
- ✓ ICE MACHINES
- AND MORE



MANUFACTURING PROCESSING TOOLS

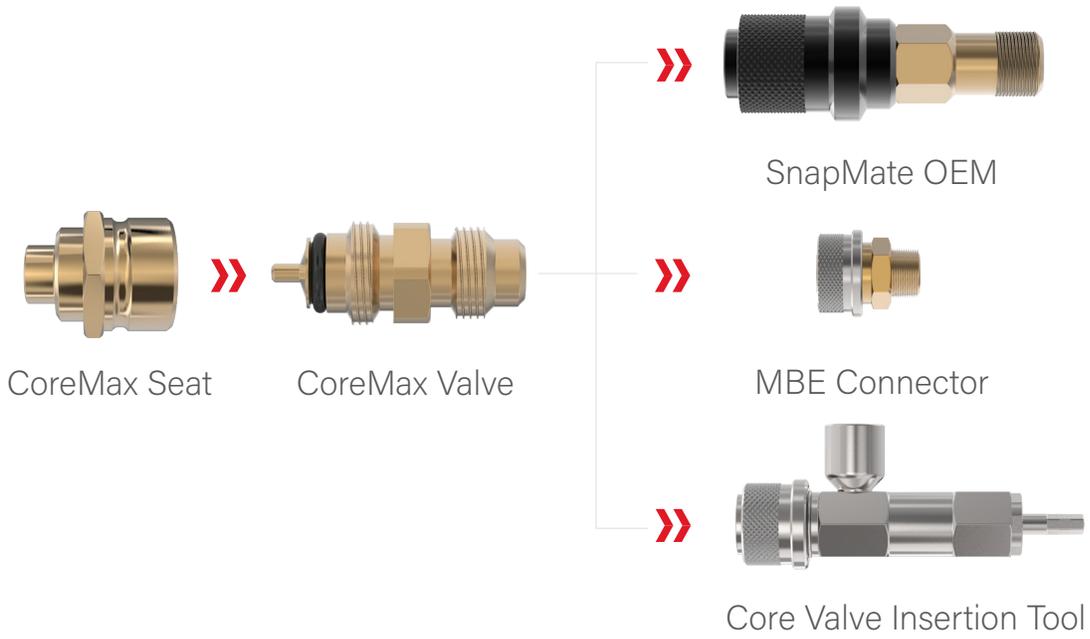

FIELD / MANUFACTURING SERVICE TOOLS

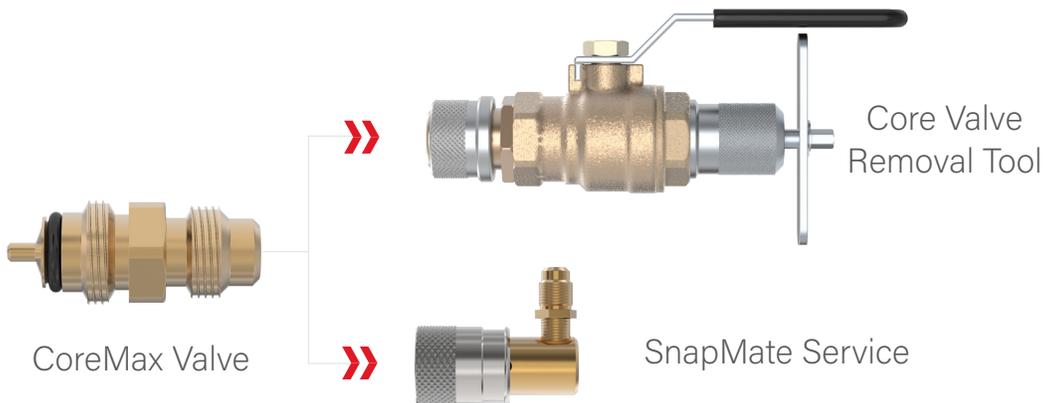

CoreMax® / Valve & Seat Styles

CoreMax® Valve mates with the CoreMax® Seat to form the complete access valve.

MATES WITH COREMAX® SEAT FOR COMPLETE ACCESS VALVE:



SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|------------------------------|-----------------------------------|----------------------------|
| Vacuum to 700 psi (48.2 bar) | -40°F to +250°F (-40°C to +121°C) | Stainless Steel, Neoprene® |


COREMAX® SEATS

For complete access valve.



- 1 Specifically designed for refrigeration applications maximizing flow and robust sealing technology.
- 2 The CoreMax® core utilizes one elastomeric seal to seal both the valve as well as the joint between the core and the seat. There is a metal to metal seal between the core and seat to ensure a complete seal.
- 3 The valve core pin position is manufactured to exact tolerances for constant sealing and maximum valve opening for the highest flow available. The Valve conforms to ARI standard 720 for pin height
- 4 The CoreMax® valve has a 7/16-20 45° flare which is the industry standard for access valves, so all standard service tools can be used.

- Manufactured to exacting tolerances, the seat is designed to mate with the CoreMax® valve core and form the sealing capability
- Designed with gripping and sealing surfaces to work with the CoreMax® system tools Internally valved
- Many options are available to fit any user system

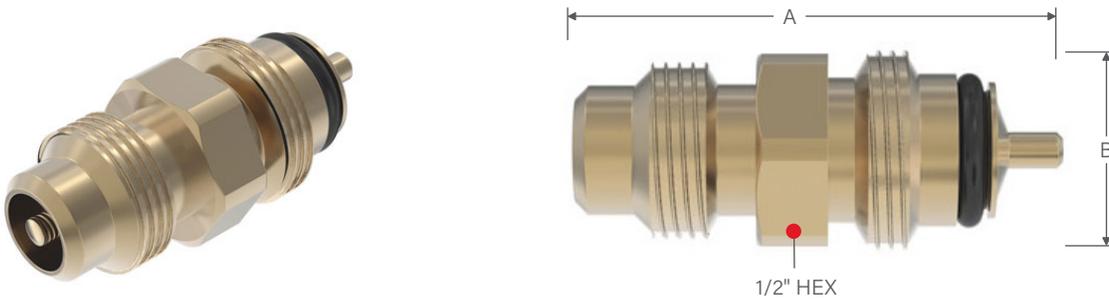

| Ordering Information | Dimensions | |
|--|-------------|-------------|
| Part Number | A | B |
| CoreMax® Valve Mates with CoreMax® Seat for Complete Access Valve | | |
| SCCA07H | 1.00 (25.4) | 1.00 (25.4) |

Dimensions: inch (mm)



| Ordering Information | | | Dimensions | | | | Installed Length* |
|----------------------|------|-------------|------------|---|---|---|-------------------|
| Style | Size | Part Number | A | B | C | D | |

CoreMax® Seats | Multiple Styles for User's Application

| | | | | | | | |
|--------------|-----------------|------------|-------------|-------------|------------|-------------|-------------|
| Stub Tube | 1/4 | SCH0730A01 | 1.00 (25.4) | 0.21 (5.3) | 0.22 (5.6) | 0.31 (7.9) | 1.26 (32.0) |
| | 3/8 | SCH0730A03 | | | 0.32 (8.1) | 0.43 (10.9) | |
| Saddle Mount | 3/8 - 0.38 Hole | SCH0730B02 | 0.92 (23.4) | 0.13 (3.3) | 0.28 (.71) | 0.37 (9.4) | |
| | 1/4 - 0.22 Hole | SCH0730B03 | | | 0.07 (1.8) | 0.22 (5.6) | |
| | 1/4 - 0.25 Hole | SCH0730B04 | | | 0.13 (3.3) | 0.18 (4.6) | 0.25 (6.4) |
| Panel Mount | 1/4 | SCH0730C03 | 1.29 (32.8) | 0.67 (17.0) | 0.22 (5.6) | 0.35 (8.9) | 1.33 (33.8) |
| | 3/8 | SCH0730C04 | | | 0.35 (8.9) | 0.44 (11.2) | |
| NPT | 1/4 | SCH0730E01 | 1.15 (29.2) | 0.54 (13.7) | 0.31 (7.9) | ----- | |

Dimensions: inch (mm)

* Installed length is CoreMax® Valve and CoreMax® Seat torqued together.

MANUFACTURING PROCESSING TOOLS

SnapMate OEM

PN: SCP062H



| Pressure Rating | Termination | Materials of Construction |
|--|-------------|----------------------------------|
| 10 millitorr (micron) vacuum to 700 psi (48.2) | 3/8 MNPT | Stainless Steel, Brass, Neoprene |

- Internal valve opens automatically upon connection and closes upon disconnection.
- Can be actuated under full pressure due to its mechanical advantage design and used in both vacuum and pressure applications
- Grips behind threads to eliminate potential thread damage with matched flow through the CoreMax® valve for efficient processing.
- Easy sleeve action is ergonomic and eliminates repetitive twisting and turning - Push to connect, pull to release

APPLICATION

Use at burst, evacuation, charge and rework stations for generalized processing. Use at every station to connect to CoreMax® Valve.

MBE

PN: SCM062W



| Pressure Rating | Termination | Materials of Construction |
|--|-------------|-----------------------------------|
| 10 millitorr (micron) vacuum to 700 psi (48.2) | 3/8 MNPT | Stainless Steel, Brass, Neoprene® |

- Pressure interlocks prevent sleeve actuation under pressure
- High flow connection tool with no flow restriction. Used to maximize flow through the seat
- Grips over the seat so it can be used with or without the CoreMax® valve
- Easy sleeve action is ergonomic and eliminates repetitive twisting and turning

APPLICATION

Use at burst, leak test stations with or without CoreMax® valve. Use at evacuation station with CoreMax® Valve installed.

Core Valve Insertion Tool

PN: SCFT10



| Pressure Rating | Termination | Materials of Construction |
|--|-------------|----------------------------|
| 10 millitorr (micron) vacuum to 700 psi (48.2) | 3/8 FNPT | Stainless Steel, Neoprene® |

- Pressure interlocks prevent sleeve actuation under pressure
- Grips over valve seat to allow for maximum evacuation through the seat prior to inserting CoreMax core valve
- Available load tool for easy core insertion into the tool. Fastest PN: SCFTL1010
- Easy sleeve action is ergonomic and eliminates repetitive twisting and turning

APPLICATION

Use at evacuation stations to maximize flow for extreme volumes to achieve maximum throughput. Insertion of valve core prior to further processing.

Installation Oiler

PN: SCL321



| Materials of Construction |
|---------------------------|
| HDPE, Brass |

- Custom nest to oil CoreMax core with overflow containment
- Reservoir has check valve to keep small amount of oil available for lubrication
- Oil containment keeps contaminants away and minimizes oil exposure to atmosphere
- Pump to fill reservoir

APPLICATION

Use to oil the CoreMax® Valve core prior to insertion and torque into valve seat.

FIELD / MANUFACTURING SERVICE TOOLS

Core Valve Removal Tool

PN: SCFT20A



| Pressure Rating | Termination | Materials of Construction |
|--|-------------|-----------------------------------|
| 10 millitorr (micron) vacuum to 750 psi (51.7) | N/A | Stainless Steel, Brass, Neoprene® |

- Pressure interlocks prevent sleeve actuation under pressure
- Grips over the valve seat to allow for CoreMax® Valve core removal and replacement without reclaiming the system
- Ball valve design to shut off system pressure
- Easy sleeve action is ergonomic and eliminates repetitive twisting and turning. Thread out/in core, rotate ball valve and replace.

APPLICATION

Use to remove and replace CoreMax® Valve core in charged units.

SnapMate Service

PN: SCTA07H



| Pressure Rating | Termination | Materials of Construction |
|--------------------------|----------------|-----------------------------------|
| Vacuum to 625 psi (43.1) | 7/16 45° Flare | Stainless Steel, Brass, Neoprene® |

- Internal valve opens automatically upon connection and closes upon disconnection and has internal actuation pin to open CoreMax® Valve
- Threaded collets grip in the threads of any 7/16-20 45° flare access valve (CoreMax and Schrader)
- Can be actuated and removed under standard system pressure
- Easy sleeve action is ergonomic and eliminates repetitive twisting and turning - Push to connect, pull to release

APPLICATION

Use by HVAC service technicians for field service.

Electric Torque Wrench

PN: SCFTP0502



| Materials of Construction |
|---------------------------|
| IR Electronic Tool |

- Pre-programmed to CoreMax® specifications of <200RPM and 8ft-lbs torque
- Hold and drive feature supports the seat so no stress is incurred on the system or operator
- 20 volt battery powered tool. Can be programmed to tailor specific needs
- Pull trigger to run tool to proper torque

APPLICATION

Use to proper torque the CoreMax® Valve core into the core seat.

Manual Torque Wrench

PN: SCFTM01



| Materials of Construction |
|---------------------------|
| Stainless Steel |

- Break away torque wrench pre-set to proper torque of 8ft-lbs.
- Manually twist wrench to pre-set torque

APPLICATION

Use to proper torque the CoreMax® valve core into the core seat.

CONNECTION TOOLS »

FasTest® sealing tools have become the standard for safe and reliable connection requirements. Ergonomic designs and easy maintenance makes FasTest® the industry preferred connector source.





1 Identify "Connects to" or Tube/Thread type for application

2 Select tool(s) that fit size requirements



| DESIGNED FOR | HVAC-R Tubes / Fittings / Access Ports | | | | |
|-------------------------|--|--|--|--|--|
| PRODUCT SERIES | XT (p.13) | ST (p.15) | RQD (p.17) | SNAPMATE (p.19) | MBE / MRE (p.21) |
| Pressure rating | Vacuum 10 mtorr (micron) to 625 psi (43.1 bar) | Vacuum 10 mtorr (micron) to 1,000 psi (68.9 bar) | Vacuum 10 mtorr (micron) to 750 psi (51.7 bar) | Vacuum 10 mtorr (micron) to 625 psi (43.1 bar) | Vacuum 10 mtorr (micron) to 625 psi (51.7 bar) |
| Connects to | Expanded Tubes | Straight Tubes | Hansen® and PCU® Male Fittings | CoreMax® /Schrader® Access Ports | Expanded Tubes |
| Sealing range | 5/16", 3/8", 1/2" 5/8", 3/4", 7/8" | 1/4", 5/16", 3/8" | 1/4", 5/16", 3/8" | 7/16-20 flare | 1/4" to 1 1/8" |
| Application type | Manual | Manual | Manual | Manual | Manual |
| Actuation method | Sleve | Sleeve | Sleeve / Lever | Sleeve | Sleeve |
| Grip method | Ball Latch | Thread Collets | Ball Latch | Thread Collets | Ball / Ring Latch |



| DESIGNED FOR | Gas Burner Testing | |
|-------------------------|------------------------------------|---|
| PRODUCT SERIES | GZNV (p.29) | G60V (p.30) |
| Pressure rating | Vacuum to 5 psi (0.4 bar) | Vacuum to 30 psi (2.1 bar) |
| Connects to | Natural Gas and Propane Regulators | Natural Gas and Propane Regulator Extension Pipes |
| Sealing range | 3/8, 1/2, 3/4 Female NPT/BSPP (G) | 3/8, 1/2, 3/4 Male NPT/BSPP (G) |
| Application type | Manual | Manual |
| Actuation method | Sleve | Sleeve |
| Grip method | Seal Friction | Thread Collets |

» INDUSTRY LEADING RESPONSIVENESS

- Majority of products ship within 2 days.
- Custom Engineered Solutions, including design, ship in weeks vs. months

AT FASTEST WE TAKE PRIDE IN BEING RESPONSIVE TO ALL OUR CUSTOMER'S NEEDS, INCLUDING PRODUCT AVAILABILITY.

3 Verify operating/test pressure meets requirements

4 Select actuation method - lever/sleeve for manual, pneumatic for automation

5 Identify desired ICON™ features



| DESIGNED FOR | | HVAC-R Tubes | | Internal Connections to Tubes / Threads | | | External Connections to Tubes / Threads | |
|-------------------------|---|--|--|---|----------------------------------|---------------------------------|---|----------------------------------|
| PRODUCT SERIES | | JNL (p.23) | JXL (p.27) | FI (p.31) | MIT (p.33) | FN (p.35) | FE (p.32) | MET (p.34) |
| Pressure rating | | Vacuum 10 mtorr (micron) to 1,000 psi (68.9 bar) | Vacuum 10 mtorr (micron) to 1,000 psi (68.9 bar) | Vacuum 10 to 120 psi (8.1 bar) | Vacuum to 10,000 psi (689.5 bar) | Vacuum to 5,000 psi (344.7 bar) | Vacuum to 500 psi (34.5 bar) | Vacuum to 10,000 psi (689.5 bar) |
| Actuation method | | Lever | Lever | Pneumatic | Manual Twist | Squeeze Lever | Pneumatic | Manual Twist |
| Grip method | | Grip Collets | Grip Collets | Fixturing / Seal Friction | Continuous Thread | Thread Collets | Fixturing / Seal Friction | Continuous Thread |
| ICON™ Technology | | | | SURE SEAL™ SEAL LIFE™ | | SURE SEAL™ | SURE SEAL™ SEAL LIFE™ | |
| TUBES | STRAIGHT  | 0.375" to 1.625" 9.53mm to 41.275mm | 0.25" to 0.875" 6.3mm to 22.2mm | 0.310" to 3.005" 7.87mm to 76.33mm | N/A | N/A | 0.030" to 5.040" 0.76mm to 128.02mm | N/A |
| | SWAGED  | | | | | | | |
| | EXPANDED  | | | | | | | |
| | FLARED  | | | | | | | |
| | BEADED  | N/A | N/A | 0.310" to 3.005" 7.87mm to 76.33mm | N/A | N/A | 0.030" to 5.040" 0.76mm to 128.02mm | N/A |
| | BARBED  | | | | | | | |
| | FORMED  | | | | | | | |
| THREADS | NPT  | N/A | N/A | 1/8 to 2 1/2 | 1/8 to 4 | 1/8 to 3/4 | 1/8 to 2 1/2 | 1/8 to 3 |
| | BSPP/BSPT  | N/A | N/A | 1/8 to 2 1/2 | 1/8 to 1 | 1/8 to 3/4 | 1/8 to 2 1/2 | 1/8 to 1 |
| | JIC 37° FLARE  | N/A | N/A | N/A | 7/16-20 to 1 5/16-12 (-4 to -16) | N/A | 7/16-20 to 1 5/16-12 (-4 to -16) | 7/16-20 to 2 1/2-12 (-4 to -32) |
| | 45° FLARE  | N/A | N/A | N/A | N/A | N/A | 7/16-20 to 1 3/8-12 (-4 to -16) | 7/16-20 to 1 1/16-14 (-4 to -12) |
| | METRIC  | N/A | N/A | M10 to M60 | M10 to M22 | M10 to M22 | M10 to M33 | CONSULT FACTORY |



DON'T SEE A SOLUTION FOR YOUR APPLICATION? Submit a custom application form and drawing to fastsales@fastestinc.com or to your local distributor.

XT / HVAC-R EXTERNAL SEALING CONNECTION TOOL

Sleeve actuated ball grip connection tool for expanded refrigeration tubes.

CONNECTS TO:

Expanded



Base connector now made of stainless steel

SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Connection Profile |
|---|-----------------------------------|--------------------|
| 10 mtorr (micron) to 625 psi (43 bar) | -40°F to +250°F (-40°C to +121°C) | Expanded Tubes |
| Housing Material | | |
| Connector - Stainless Steel SurConnect™ - Aluminum | | |
| Termination Profile | Seal Material* | |
| 1/4 NPT | Neoprene® | |

* More seal material types available, consult factory.

- 1 Sleeve locks under pressure to prevent accidental disconnection
- 2 Instant connection for copper and aluminum flared tubes commonly used in refrigeration
- 3 Connects to a broad range of flared ends including rough cut ends
- 4 Deep vacuum capabilities down to 10 millitorr (micron)
- 5 Quick and easy seal replacement to minimize down time, maintenance, and tool inventory

ACTUATION METHOD

Manual Sleeve: Easy, ergonomic sleeve action eliminates repetitive twisting and turning - push to connect, pull to release

ICON™ TECHNOLOGY

Consult Factory


ACCESSORIES



The SurConnect™ Advantage

- Green ring indicates a secure connection, improving safety by preventing accidental disconnects.
- Easily installed on existing XT Connectors or available fully assembled.
- Aluminum light weight.
- Color coded by size for easy recognition.

XT / HVAC-R EXTERNAL SEALING CONNECTION TOOL

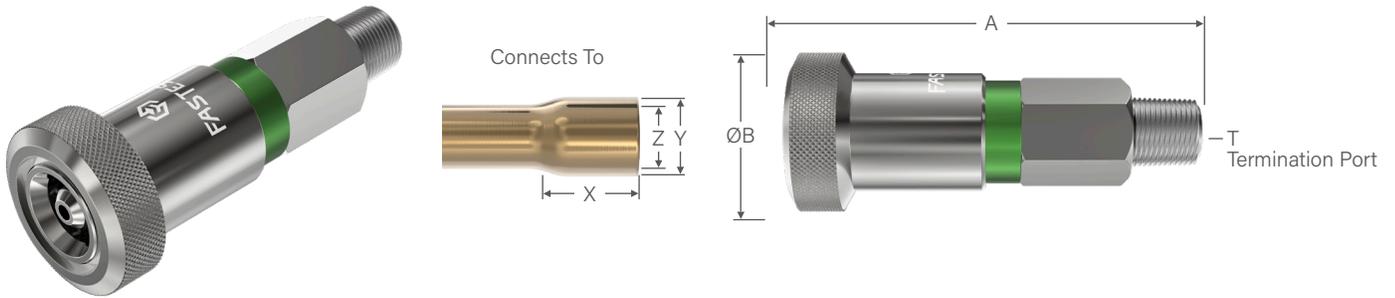

| Ordering Information | | | | | | | Dimensions | | | |
|----------------------|-------------------------|---------------------|---------------------|-------------|------------------------------------|-------------|------------|---|---|--------|
| Connects To | | | | Part Number | Replacement Seals Bulk Pack (5) | Rebuild Kit | A | B | T | Flow Ø |
| Tube Size | Flare Length (Dim X) | Flare OD (Dim Y) | Flare ID (Dim Z) | | | | | | | |

XT | Sleeve Actuated Connectors for Expanded Tubes

| | | | | | | | | | | | |
|------|-------------------------------|-------------|-------------|---------|-------|-------|----------------|-------------|------------|-------------|------------|
| 5/16 | 0.30 to 1.00 (7.6 to 25.4) | 0.44 (11.2) | 0.31 (7.9) | XT05042 | XTB05 | XTR05 | 3.23 (82.0) | 1.19 (30.2) | 1/4 NPT | .062 (1.6) | |
| 3/8 | | 0.50 (12.7) | 0.37 (9.4) | XT06042 | XTB06 | XTR06 | | 3.31 (84.1) | | 1.25 (31.8) | 0.12 (3.1) |
| 1/2 | | 0.63 (15.9) | 0.49 (12.4) | XT08042 | XTB08 | XTR08 | | | | 1.37 (34.8) | 0.22 (5.6) |
| 5/8 | | 0.73 (18.5) | 0.62 (15.7) | XT10042 | XTB10 | XTR10 | | 1.50 (38.1) | | 0.25 (6.4) | |
| 3/4 | 0.37 to 1.00 (9.4 to 25.4) | 0.86 (21.8) | 0.74 (18.8) | XT12042 | XTB12 | XTR12 | 3.33 (84.6) | 1.62 (41.2) | | 0.27 (6.9) | |
| 7/8 | | 0.99 (25.1) | 0.87 (22.1) | XT14042 | XTB14 | XTR14 | | 1.72 (43.7) | | 0.28 (7.1) | |

Dimensions: inch (mm)

(i) NOTE: Not recommended for water dunk applications.

| Ordering Information | | | | |
|----------------------|--------------------------------|---------------------|--------------------------------------|-----|
| Connects To | SurConnect™ Kit Part Number | XT with SurConnect™ | XT with SurConnect™ & Process Tip | Tip |

XT WITH SURCONNECT™ | Sleeve Actuated Connectors for Expanded Tubes with Additional Safety Feature

| | | | | |
|-----|----------|-------------|---------------|-------------|
| 3/8 | XT06SHR3 | XT06042SHR3 | XT06042SHR3H4 | 1/4 Hansen® |
| | | | XT06042SHR3P4 | 1/4 PCU* |
| | | | XT06042SHR3H6 | 3/8 Hansen* |
| | | | XT06042SHR3P6 | 3/8 PCU* |
| 3/4 | XT12SHR2 | XT12042SHR2 | XT12042SHR2H4 | 1/4 Hansen® |
| | | | XT12042SHR2P4 | 1/4 PCU* |
| | | | XT12042SHR2H6 | 3/8 Hansen* |
| | | | XT12042SHR2P6 | 3/8 PCU* |
| 7/8 | XT14SHR1 | XT14042SHR1 | XT14042SHR1H4 | 1/4 Hansen® |
| | | | XT14042SHR1P4 | 1/4 PCU* |
| | | | XT14042SHR1H6 | 3/8 Hansen* |
| | | | XT14042SHR1P6 | 3/8 PCU* |

(i) NOTE: Not recommended for water dunk applications.



DON'T SEE A SOLUTION FOR YOUR APPLICATION? Submit a custom application form and drawing to fastsales@fastestinc.com or to your local distributor.

ST / HVAC-R EXTERNAL SEALING CONNECTION TOOL

Sleeve actuated grip and seal connection tool for straight tubes in refrigeration.

CONNECTS TO:

Straight



SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|--|-----------------------------------|---------------------------|
| 10 mtorr (micron) to 1000 psi (69 bar) | -40°F to +250°F (-40°C to +121°C) | Stainless Steel |
| Termination Port | | Seal Material* |
| 1/4 NPT | | Neoprene® |

* Additional seal material types available, consult factory.

ACTUATION METHOD

Manual Sleeve: Easy sleeve action is ergonomic and eliminates repetitive twisting and turning. Pull to connect, push to release.

ICON™ TECHNOLOGY


Consult Factory

ACCESSORIES

Visit fastestinc.com

- 1 Pressure assisted sealing eliminates leaks and resists movement under pressure
- 2 Instant connection for copper, steel, and aluminum tubes commonly used in refrigeration
- 3 Designed specifically for the demanding requirements of the refrigeration industry
- 4 Deep vacuum capabilities down to 10millitorr (micron)
- 5 Quick and easy seal replacement to minimize down time, maintenance, and tool inventory

ST / HVAC-R EXTERNAL SEALING CONNECTION TOOL

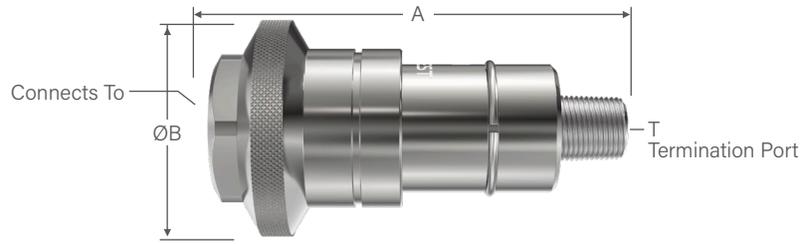

| Ordering Information | | | | Dimensions | | | |
|------------------------------|----------------|------------------------------------|--------------|-------------|-------------|---------|--------------------|
| Connects To +0.015/-0.010 | Part Number | Replacement Seals Bulk Pack (5) | Rebuild Kit* | A | B | T | Insertion Depth |
| 0.250 (6.4) | ST04042 | STB04 | STC04 | 2.75 (69.9) | 1.14 (29.0) | 1/4 NPT | 0.62 (15.7) |
| 0.312 (7.9) | ST05042 | STB05 | STC04 | | 1.19 (30.2) | | |
| 0.375 (9.5) | ST06042 | STB06 | STC04 | 3.23 (82.0) | 1.50 (38.1) | | 0.75 (19.1) |

Dimensions: inch (mm)

*Includes complete collet set.

Additional sizes available, contact factory.



RQD / HVAC-R EXTERNAL SEALING CONNECTION TOOL

External sealing connection tool for attachment to Hansen® and PCU® tips under pressure.

CONNECTS TO:

Hansen® Tips PCU® Tips



- 1 Sleeve lock connection prior to pressure engagement minimizes force to connect through handle activation
- 2 Connects and vents even under pressure using lever handle to keep refrigerant away from the operator
- 3 Internal HTPE seal to keep refrigerant from exhaling back onto operator
- 4 Internal poppet style seal for dry refrigerant operation
- 5 Minimal maintenance required



SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|----------------------------|-----------------------------------|---------------------------|
| Vacuum to 750 psi (52 bar) | -40°F to +250°F (-40°C to +121°C) | Black Oxide Steel |
| Termination Port | | Seal Material* |
| 1/4 or 3/8 NPT | | Neoprene® |

* Additional seal material types available, consult factory.

- i Designed for ISO 7241-1 Series B coupling "Tips"
- i RQD can mate with, but not limited to, the following brands: Parker® 60, PCU® 250 & 410, Hansen® HK, SABE® IB Series (China), AeroQuip® FD45, Faster® HNV Series, Snap-Tite® 72 series, Stucchi® IRB, Perfecting® H Series, Safeway® S10 Series, Tomco® H Series, Cejn® X75, Foste®r HX-S, and Nitto® 250.

ACTUATION METHOD

Sleeve / Lever Handle: Easy sleeve connection is ergonomic and eliminates repetitive twisting and turning, cam over lever handle opens poppets under pressure

ICON™ TECHNOLOGY

Consult Factory

ACCESSORIES

Visit fastestinc.com

RQD / HVAC-R EXTERNAL SEALING CONNECTION TOOL



| Ordering Information | | | | Dimensions | | | |
|----------------------|-------------|---------------------------------|-------------|------------|---|---|---|
| Connects To | Part Number | Replacement Seals Bulk Pack (5) | Rebuild Kit | A | B | C | D |

RQD | Lever Action Style for PCU* Tips

| | | | | | | | |
|---------------------------|--------|---------|--------|-------------|--------------|--------------|---------|
| 1/4 PCU*— Model 64 Tip | KA04PA | KSA04 | KR04A | 1.75 (44.5) | 4.39 (111.5) | 7.00 (177.8) | 1/4 NPT |
| 1/4 PCU*— Model 61 Tip | KA04PB | KSM04 | KR04 | | | | 3/8 NPT |
| 3/8 PCU*— Model 78 Tip | KA06PA | KSM06PB | KR06PA | 1.95 (49.5) | 4.54 (115.3) | 7.00 (177.8) | 3/8 NPT |
| 3/8 PCU*— Model 66 Tip | KA06PB | KSM06PB | KR06PB | | | | |

RQD | Lever Action Style for Hansen* Tips

| | | | | | | | |
|----------------|--------|---------|--------|-------------|--------------|--------------|---------|
| 1/4 Hansen* 2K | KA04HB | KSM04 | KR04 | 1.75 (44.5) | 4.39 (111.5) | 7.00 (177.8) | 1/4 NPT |
| 3/8 Hansen* 3K | KA06HB | KSM06HB | KR06HB | 1.95 (49.5) | 4.54 (115.3) | | 3/8 NPT |

Dimensions: inch (mm)



SNAPMATE / EXTERNAL SEALING CONNECTION TOOL

Sleeve actuated external grip and seal connection tool for CoreMax® and Schrader® flare connections.

CONNECTS TO:

45° Flare



SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|----------------------------|-----------------------------------|---------------------------|
| Vacuum to 625 psi (43 bar) | -40°F to +250°F (-40°C to +121°C) | Stainless Steel, Brass |
| Termination Port | | Seal Material* |
| -4 [7/16-20] 45° Flare | | Neoprene® |

* Additional seal material types available, consult factory.

ACTUATION METHOD

Manual Sleeve: Easy, ergonomic sleeve action eliminates repetitive twisting and turning - push to connect, pull to release

ICON™ TECHNOLOGY


Consult Factory

ACCESSORIES

Visit fastestinc.com

- 1 Internally valved for refrigerant containment upon disconnection
- 2 Collet design locks securely into CoreMax® and common Schrader® valves with 1/4 45° Flare with 7/16-20 thread
- 3 Compact size fits into tight spaces
- 4 90° termination port for best ergonomics of small connection tool
- 5 Quick and easy seal replacement to minimize down time, maintenance, and tool inventory

SNAPMATE / EXTERNAL SEALING CONNECTION TOOL

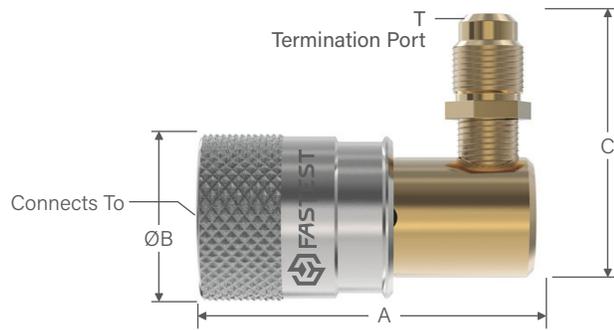

| Ordering Information | | | | Dimensions | | | |
|--------------------------------------|-------------|---------------|------------|-------------|-------------|-------------|---------------------------|
| Connects To | Part Number | Main Seal Set | Repair Kit | A | B | C | T |
| CoreMax -4 [7/16-20] 45° Flare | SCTA07H | SCBA07H | SCRA07H | 1.94 (49.3) | 0.93 (23.6) | 1.51 (38.3) | -4 [7/16-20] 45° Flare |

Dimensions: inch (mm)



MBE/MRE / HVAC-R EXTERNAL SEALING CONNECTION TOOL

Sleeve actuated external grip and seal connection tools that latches over tube features.

CONNECTS TO:

Expanded CoreMax Seat



SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|----------------------------|-----------------------------------|---------------------------|
| Vacuum to 625 psi (43 bar) | -40°F to +250°F (-40°C to +121°C) | Stainless Steel |
| Termination Port | | Seal Material* |
| 1/4 to 1-1/4 NPT | | Neoprene* |

* Additional seal material types available, consult factory.

ACTUATION METHOD

Manual Sleeve: Easy, ergonomic sleeve action eliminates repetitive twisting and turning - push to connect, pull to release

ICON™ TECHNOLOGY


Consult Factory

ACCESSORIES

Visit fastestinc.com

- 1 Sleeve locks under pressure to eliminate disconnection under pressure
- 2 MBE - ball latch and MRE - ring latch over tube features such as flare or bead
- 3 Straight through flow for full flow requirements
- 4 Quick and easy seal replacement to minimize down time, maintenance, and tool inventory

MBE/MRE / HVAC-R EXTERNAL SEALING CONNECTION TOOL

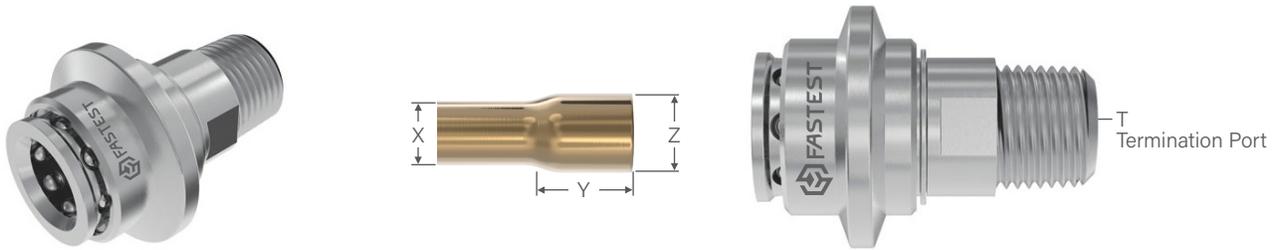

| Ordering Information | | | | | Dimensions | |
|----------------------|----------------|-------------|-------------------------------|--------------------|-------------|--------------|
| Connects To | | | Replacement Seals Pack (5) | Rebuild Kit | Termination | Flow Dia. |
| Tube ØX | Flare Length Y | Flare ØZ | | | | |
| 0.25 (6.4) | 0.20 (5.1) | 0.32 (8.0) | Consult Factory | Consult Factory | 1/4 NPT | 0.19 (4.8) |
| 0.31 (7.9) | 0.27 (6.9) | 0.38 (9.7) | | | | 0.25 (6.3) |
| 0.38 (9.7) | 0.35 (8.9) | 0.44 (11.3) | | | 3/8 NPT | 0.31 (7.9) |
| 0.50 (12.7) | 0.45 (11.4) | 0.57 (14.5) | | | | 0.44 (11.1) |
| 0.63 (16.0) | 0.53 (13.5) | 0.70 (17.8) | | | 3/4 NPT | 0.56 (14.1) |
| 0.75 (19.1) | 0.68 (17.3) | 0.84 (21.3) | | | | 0.67 (16.9) |
| 0.88 (22.4) | 0.79 (20.1) | 0.97 (24.6) | | | 1 NPT | 0.79 (19.9) |
| 1.00 (25.4) | 0.83 (21.1) | 1.12 (28.5) | | | | 0.94 (23.9) |
| 1.13 (28.7) | 1.13 (28.7) | 1.23 (31.3) | | | 1-1/4 NPT | 1.03 (26.0) |
| 1.38 (35.1) | 1.40 (35.6) | 1.49 (37.9) | | | | 1.27 (32.1) |

Dimensions: inch (mm)

How to Order

The MBE and MRE Series connectors are designed for mechanical gripping on expanded tubing. Connectors are designed, engineered and manufactured to your specific application requirements.

For part number and a price quotation:

- 1) Identify the gripping and sealing areas of your test piece.
- 2) Contact FasTest with information on test pressure, media and provide detailed drawing, including tolerances of test piece.



JNL / INTERNAL SEALING CONNECTION TOOL

Manual lever actuated internal grip and seal connection tool for straight tubes / bores.

CONNECTS TO:

Straight



SPECIFICATIONS

| Pressure Rating* | Operating Temperatures | Materials of Construction |
|---|--------------------------------------|---|
| JNLO / JNL1: 10 mtorr (micron) to 1000 psi (68.9 bar) | -40°F to +250°F (-40°C to +121°C) | Aluminum Stainless Steel Acetal (POM) Urethane Collet Retainer |
| JNL2: 10 mtorr (micron) to 750 psi (51.7 bar) | | |
| Termination Port | | Seal Material** |
| 1/8 NPT | | Neoprene® |

i * Pressure rating based on the test piece having a surface finish greater than 16 rms and a hardness of no more than 95 Rb to grip and seal at the rated pressure. A surface finish of 8 rms may be acceptable if the test piece has a hardness no greater than 40 Rb.

**Additional seal material types available, consult factory.

ACTUATION METHOD

Lever Actuated: Simply flip the ergonomic handle for ease of use

ICON™ TECHNOLOGY


Consult Factory

ACCESSORIES

Visit fastestinc.com

- 1** Pressure assisted sealing and gripping with internal safety lock feature prevents accidental disconnection under pressure if handle is released
- 2** Instant connection for copper, steel, and aluminum tubes commonly used in refrigeration and other industrial applications
- 3** Stainless steel collets provide maximum grip with minimum distortion of the test piece
- 4** Quick and easy seal replacement to minimize down time, maintenance and tool inventory
- 5** Self aligning connector requires no operator adjustment

JNL / INTERNAL SEALING CONNECTION TOOL

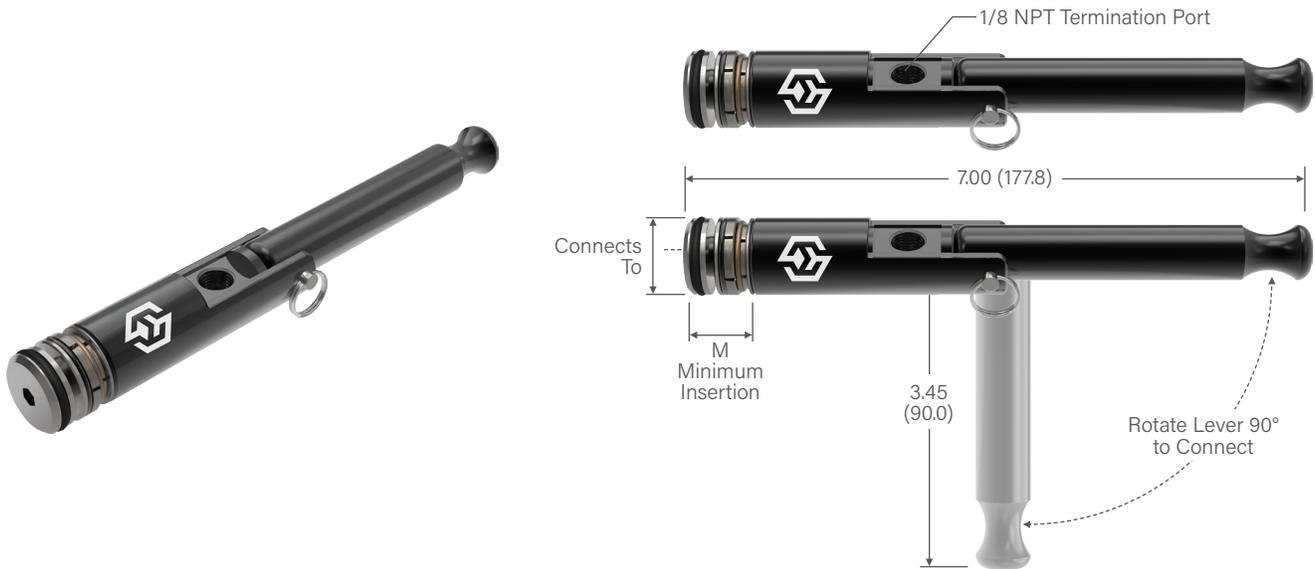

| Ordering Information | | | Dimensions |
|---|-------------|------------------------------------|------------|
| Connects To +0.010/-0.010 (+0.25/-0.25) | Part Number | Replacement Seals Bulk Pack (5) | M |

JNL0 and JNL1 | Lever Actuated Connectors for Internal Tubes / Bores

| | | | |
|--------------|-----------|----------|----------------|
| 0.375 (9.5) | JNL00375H | SN00375H | 0.53 (13.5) |
| 0.500 (12.7) | JNL00500H | SN00500H | |
| 0.590 (15.0) | JNL10590 | SN10590 | |
| 0.625 (15.9) | JNL10625 | SN10625 | |
| 0.750 (19.1) | JNL10750 | SN10750 | |
| 0.785 (19.9) | JNL10785 | SN10785 | |
| 0.875 (22.2) | JNL10875 | SN10875 | |

JNL0 and JNL1 | Lever Actuated Connectors for Metric Internal Tubes / Bores

| | | | |
|---------------|----------|----------|----------------|
| 10mm ± 0.25mm | JNL0M10H | SN00395H | 13.5 (0.53) |
| 11mm ± 0.25mm | JNL0M11H | SN00435H | |
| 12mm ± 0.25mm | JNL0M12H | SN00470 | 16.0 (0.63) |
| 13mm ± 0.25mm | JNL0M13H | SN00515H | |
| 14mm ± 0.25mm | JNL0M14H | SN00550H | |
| 15mm ± 0.25mm | JNL1M15 | SN10590 | |
| 16mm ± 0.25mm | JNL1M16 | SN10630 | |
| 18mm ± 0.25mm | JNL1M18 | SN10710 | |
| 20mm ± 0.25mm | JNL1M20 | SN10785 | |


Dimensions: inch (mm)

NOTE: JNL sizes available in .005" (.13 mm) increments per customer request. Consult factory.



DON'T SEE A SOLUTION FOR YOUR APPLICATION? Submit a custom application form and drawing to fastsales@fastestinc.com or to your local distributor.

JNL / INTERNAL SEALING CONNECTION TOOL

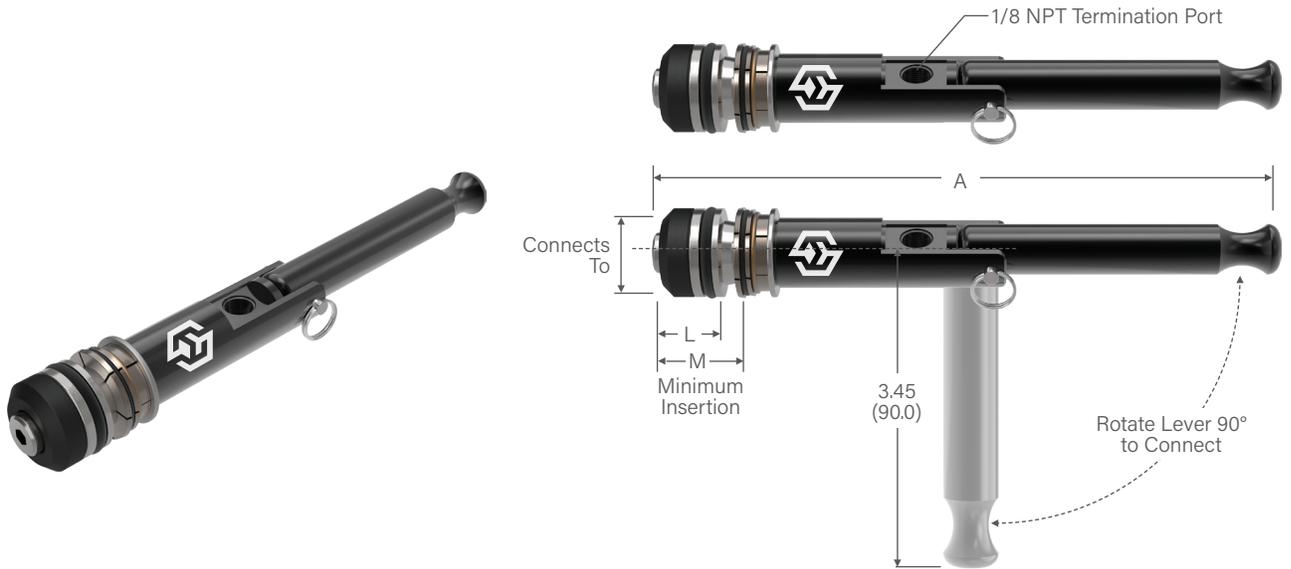

| Ordering Information | | | Dimensions | | |
|--|-------------|------------------------------------|--------------|-------------|-------------|
| Connects To +0.030/-0.010 (+0.76/-0.25) | Part Number | Replacement Seals Bulk Pack (5) | A | L | M |
| JNL2 Lever Actuated Connectors for Internal Tubes / Bores | | | | | |
| 1.000 (25.4) | JNL21000 | SN21000 | 7.71 (195.8) | 1.31 (33.3) | 1.39 (35.4) |
| 1.125 (28.6) | JNL21125 | SN21125 | | | |
| 1.250 (31.8) | JNL21250 | SN21250 | 7.71 (195.8) | 1.44 (36.6) | 1.51 (38.4) |
| 1.375 (34.9) | JNL21375 | SN21375 | 7.84 (199.1) | 1.56 (39.7) | 2.05 (52.1) |
| 1.500 (38.1) | JNL21500 | SN21500 | 7.96 (202.2) | 1.69 (43.0) | 2.12 (53.9) |
| 1.625 (41.3) | JNL21625 | SN21625 | 8.09 (205.5) | 1.81 (46.0) | 2.30 (58.5) |

Dimensions: inch (mm)

NOTE: Additional JNL2 sizes available per customer request. Consult factory.

CUSTOM ENGINEERED SOLUTIONS



**WE TRANSFORM
STANDARDIZED
TOOLS INTO
TAILOR-MADE
SOLUTIONS TO
FIT YOUR EXACT
REQUIREMENTS.**

ASK US HOW.

JXL / EXTERNAL SEALING CONNECTION TOOL

Manual lever actuated external grip and seal connection tool for straight tube.

CONNECTS TO:

Straight Swaged



SPECIFICATIONS

| Pressure Rating* | Operating Temperatures | Materials of Construction |
|---|--------------------------------|--|
| 10 mtorr (micron) to 1,000 psi (69 bar) | 0°F to +200°F (-17°C to +93°C) | Anodized Aluminum, Stainless Steel, and Acetal (POM) |
| Termination Port | | Seal Material** |
| 1/8 to 1/4 NPT/BSPP (G) | | Neoprene® |

i *Pressure rating based on metal test piece not exceeding 30 Rockwell C hardness. As a general guideline, surface must be 5 micro inches or greater. Surfaces less than 5 micro inches not recommended.

**Additional seal material types available, consult factory.

ACTUATION METHOD

Lever Actuated: Simply flip the ergonomic handle in either direction for ease of use

ICON™ TECHNOLOGY


Consult Factory

ACCESSORIES

Visit fastestinc.com

- 1** Pressure assisted sealing and gripping with internal safety lock feature resists accidental disconnection under high pressure if handle is released
- 2** Instant connection for copper, steel, and aluminum tubes commonly used in refrigeration and other industrial applications
- 3** Stainless steel collets provide maximum grip with minimum distortion of the test piece
- 4** Quick and easy seal replacement to minimize down time, maintenance, and tool inventory
- 5** Self aligning connector requires no operator adjustment

JXL / EXTERNAL CONNECTION TOOL / IMPERIAL / METRIC EXTERNAL TUBES

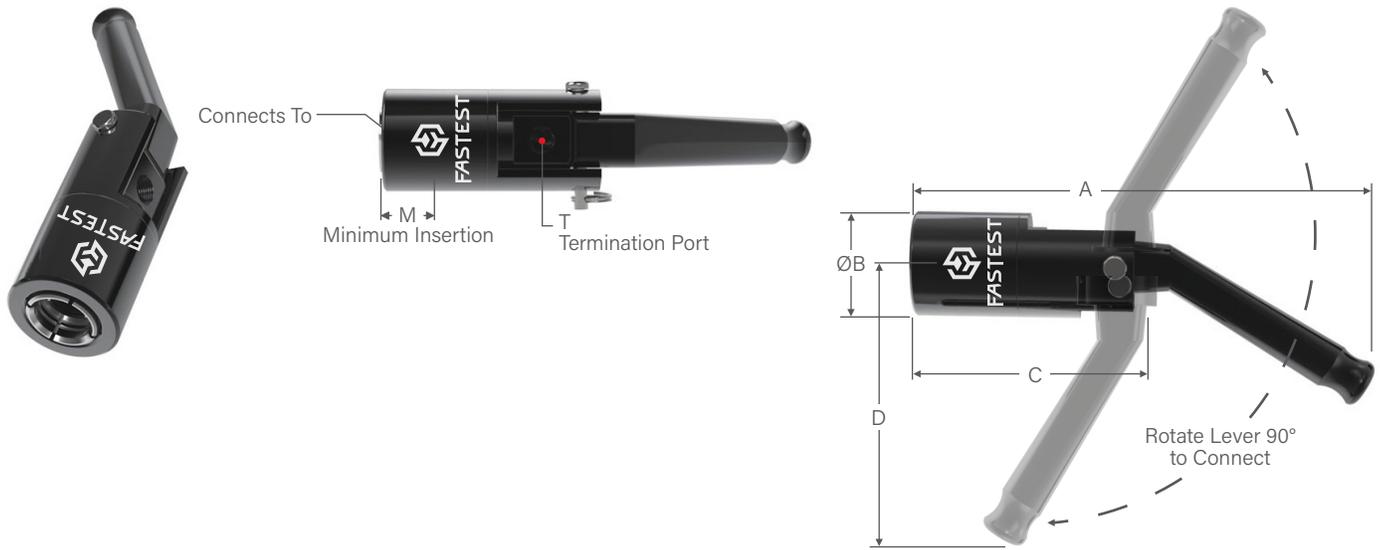

| Ordering Information | | | Dimensions | | | | | | |
|----------------------|-------------|---------------|------------|---|---|---|---|---|---------------|
| Sealing Range | Part Number | Main Seal Set | A | B | C | D | M | T | Flow Diameter |

JXL0 and JXL1 | Lever Actuated Connectors for Imperial External Tubes

| | | | | | | | | | |
|--------------|----------|----------|-----------------|----------------|----------------|-----------------|----------------|---------|------------|
| 0.25 ± .010 | JXL00250 | SXL00250 | 7.27 (184.7) | 1.13 (28.8) | 3.65 (92.7) | 4.22 (107.2) | 0.79 (20.1) | 1/8 NPT | 0.24 (6.1) |
| 0.312 ± .010 | JXL00312 | SXL00312 | | | | | | | |
| 0.375 ± .010 | JXL00375 | SXL00375 | | | | | | | |
| 0.500 ± .010 | JXL00500 | SXL00500 | | 1.62 (41.2) | 3.58 (90.9) | | 0.85 (21.6) | 1/4 NPT | |
| 0.625 ± .010 | JXL10625 | SXL10625 | | | | | | | |
| 0.750 ± .010 | JXL10750 | SXL10750 | | | | | | | |
| 0.875 ± .010 | JXL10875 | SXL10875 | | | | | | | |

JXL0 and JXL1 | Lever Actuated Connectors for Metric External Tubes

| | | | | | | | | | |
|---------------|---------|----------|-----------------|----------------|----------------|-----------------|----------------|--------------|------------|
| 6mm ± 0.25mm | JXL0M6 | SXL00236 | 7.27 (184.7) | 1.13 (28.8) | 3.65 (92.7) | 4.22 (107.2) | 0.79 (20.1) | 1/8 BSPP (G) | 0.24 (6.1) |
| 8mm ± 0.25mm | JXL0M8 | SXL00312 | | | | | | | |
| 10mm ± 0.25mm | JXL0M10 | SXL00394 | | | | | | | |
| 12mm ± 0.25mm | JXL0M12 | SXL00472 | | 1.62 (41.2) | 3.58 (90.9) | | 0.85 (21.6) | 1/4 BSPP (G) | |
| 16mm ± 0.25mm | JXL1M16 | SXL10630 | | | | | | | |
| 18mm ± 0.25mm | JXL1M18 | SXL10710 | | | | | | | |
| 20mm ± 0.25mm | JXL1M20 | SXL10787 | | | | | | | |
| 22mm ± 0.25mm | JXL1M22 | SXL10865 | | | | | | | |

Dimensions: inch (mm)

NOTE: Table above shows common connections. Additional sizes available for JXL Series connectors. Consult factory or details.




DON'T SEE A SOLUTION FOR YOUR APPLICATION? Submit a custom application form and drawing to fastsales@fastestinc.com or to your local distributor.

GZNV / INTERNAL GAS BURNER TESTING

Internally valved manual sealing connection tool for Natural Gas or Propane Burner Testing.

AVAILABLE RANGE: 3/8 NPT to 3/4 NPT



SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|-----------------------------|--------------------------------|---|
| Vacuum to 5 psi (0.345 bar) | 0°F to +200°F (-17°C to +93°C) | Anodized Aluminum, Brass, Molded Nylon Handle |
| Termination Port | | Seal Material* |
| 1/4, 1/2 NPT | | Main: Urethane Internal: Buna-N |

* Additional seal material types available, consult factory.

ACTUATION METHOD

Lever Handle: Two way actuation handle is simple and ergonomic for production applications

ICON™ TECHNOLOGY

Consult Factory

For part numbers or additional product information:
Contact fastsales@fastestinc.com

- 1 Lockable collar to keep sealing pressure consistent and internally valved to prevent gas flow once disconnected
- 2 Adjustable ring to accommodate the widest sealing range in the industry
- 3 Internal shut-off valve to stop the flow of gas when handle is in the disconnected position
- 4 Non-sparking aluminum and brass components

G60V / EXTERNAL GAS BURNER TESTING

Internally valved sleeve actuated external grip and seal connection tool for Natural Gas or Propane Burner Testing.

AVAILABLE RANGE: 3/8 NPT to 3/4 NPT

MNPT



SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|----------------------------|--------------------------------|---|
| Vacuum to 30 psi (2.1 bar) | 0°F to +200°F (-17°C to +93°C) | Stainless Steel, Brass, Anodized Aluminum |
| Termination Port | | Seal Material* |
| 3/8, 1/2, 3/4 NPT | | Main: Neoprene® Internal: Buna-N |

* Additional seal material types available, consult factory.

ACTUATION METHOD

Manual Sleeve: Easy, ergonomic sleeve action eliminates repetitive twisting and turning - push to connect, pull to release

ICON™ TECHNOLOGY

Consult Factory

For part numbers or additional product information: Contact fastsales@fastestinc.com

- 1 SurConnect™ - Green to go visible indicator to ensure complete connection and internally valved to prevent gas flow once disconnected
- 2 Instant external threaded connection with floating piston to ensure proper face / ID sealing position
- 3 Collet design locks securely into external threads or behind the threads
- 4 Connect and seal to NPT male threads
- 5 Stainless steel components for demanding production environments - brass collets for non-sparking



DON'T SEE A SOLUTION FOR YOUR APPLICATION? Submit a custom application form and drawing to fastsales@fastestinc.com or to your local distributor.

FI / INTERNAL SEALING CONNECTION TOOL

Pneumatic sealing connection tool for internal sealing in automated and semi-automated processes.

AVAILABLE RANGE: .310" to 3.005" (7.87mm to 76.33mm)

Straight Expanded Flared Beaded Barbed Form End Swaged



NPT SAE BSPP (G)/BSPT METRIC



- 1 Automated processes and high-volume production testing including pick and place and delicate robotic handling applications
- 2 Capable of sealing conventional and unique sealing surfaces including smooth, porous, out of round, and threaded
- 3 Quick change seal sets to accommodate multiple sizes of tubing and easy field maintenance
- 4 Available with Shaft Extensions for accessibility to seal remote ports or multiple ports with close center to center distances - consult factory for further information

SPECIFICATIONS

| Pressure Rating | Pilot Pressure | Operating Temperatures |
|--|--|---|
| Vacuum to 120 psi (8.3 bar) | 60 to 120 psi (4.1 to 8.3 bar) | 0°F to +200°F (-17°C to +93°C) |
| Termination Port | Materials of Construction | Seal Material* |
| Female 10-32 UNF, M5 x 0.8, NPT/BSPP (G): 1/8 to 3/4 | Anodized Aluminum, Stainless Steel, Potted PCA | Standard: Neoprene®, Urethane Optional: FKM, Buna-N, EPDM, FDA White Neoprene® |

* Additional seal material types available, consult factory.
** Operating Temp: 32°F-100°F (0°C-38°C) for ICON™.

- i Sealing connection tool and test part should be rigidly fixtured to prevent separation when under pressure (fixturing not required for vacuum applications).

ACTUATION METHOD

Pneumatic: Pilot pressure applied to seals with no metal contact and uniform seal movement seals inside tubes and pipes with no marring.

ICON™ TECHNOLOGY

SURE SEAL™

SEAL LIFE™

For part numbers or additional product information:
Contact fastsales@fastestinc.com

FE / EXTERNAL SEALING CONNECTION TOOL

Pneumatic sealing connection tool for external sealing in automated and semi-automated processes.

AVAILABLE RANGE: .030" to 5.040" (0.76mm to 128.02mm)

Straight Expanded Flared Beaded Barbed Formed Swaged



SPECIFICATIONS

| Pressure Rating | Pilot Pressure | Operating Temperatures** |
|--|--|---|
| Vacuum to 500 psi (34 bar) | 60 psi (4.1 bar) | 0°F to +200°F (-17°C to +93°C) |
| Termination Port | Materials of Construction | Seal Material* |
| Female 10-32 UNF, M5X8, NPT/BSPP (G): 1/8 to 2 1/2 | Anodized Aluminum, Stainless Steel, Potted PCA | Standard: Neoprene, Urethane Optional: FKM, Buna-N, EPDM, FDA White Neoprene |

* Additional seal material types available, consult factory.
** Operating Temp: 32°F-100°F (0°C-38°C) for ICON™.

i Sealing Connection Tool and test part should be rigidly fixtured to prevent separation when under pressure (fixturing not required for vacuum applications).

ACTUATION METHOD

Pneumatic: Pilot pressure applied to seals with no metal contact and uniform seal movement seals inside tubes and pipes with no marring.

ICON™ TECHNOLOGY

SURE SEAL™

SEAL LIFE™


For part numbers or additional product information:
Contact fastsales@fastestinc.com

- 1** Automated processes and high volume production testing including pick-and-place and delicate robotic handling applications
- 2** Capable of sealing conventional and unique sealing surfaces including threads with the addition of a pilot booster
- 3** Quick change seal sets to accommodate multiple sizes of tubing and easy field maintenance - use neoprene for standard sealing, use urethane for maximum abrasion resistance / high pressure and duty cycle applications

MIT / INTERNAL CONNECTIONS

Manual twist sealing connection tool for internal threaded ports.

AVAILABLE RANGE: 1/8" to 4" (3.175mm to 101.6mm) Threads

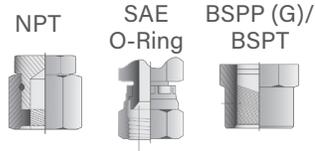

SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|--------------------------------|----------------------------------|-------------------------------|
| Vacuum to 10,000 psi (689 bar) | -40°F to +200°F (-40°C to +93°C) | Stainless Steel |
| Termination Port | | Seal Material* |
| NPT, SAE 37° Flare | | Urethane, Neoprene, or Buna-N |

*Additional seal material types available, consult factory.

ACTUATION METHOD

Manual Twist: Finger-tight connection eliminates tape and sealants

ICON™ TECHNOLOGY

Consult Factory


For part numbers or additional product information:
Contact fastsales@fastestinc.com

- 1 Pressure assisted sealing eliminates leaks and resists movement under pressure
- 2 Leak-tight seal prevents contamination of media and reduces scrap and test damage
- 3 Available in flow or plug versions
- 4 Quick and easy seal replacement to minimize down time, maintenance, and tool inventory

MET / EXTERNAL SEALING CONNECTION TOOL

Manual twist sealing connection tool for external threads.

AVAILABLE RANGE: 1/8" to 3" (3.175mm to 76.2mm) Threads

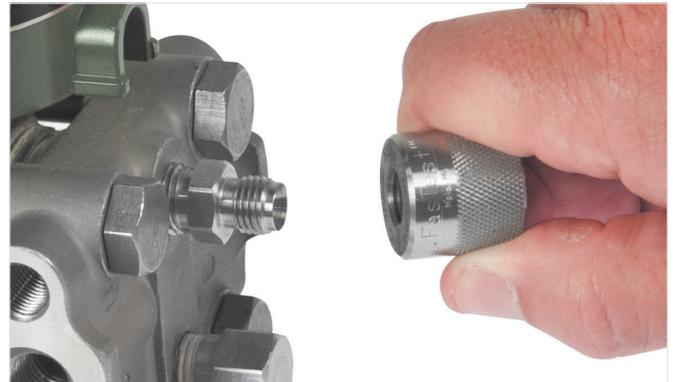

SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|--------------------------------|----------------------------------|---------------------------|
| Vacuum to 10,000 psi (689 bar) | -40°F to +200°F (-40°C to +93°C) | Stainless Steel |
| Termination Port | | Seal Material* |
| NPT, SAE 37° Flare | | Urethane |

* Additional seal material types available, consult factory.

ACTUATION METHOD

Manual Twist: Finger-tight connection eliminates tape and sealants

ICON™ TECHNOLOGY

Consult Factory

For part numbers or additional product information:
Contact fastsales@fastestinc.com

- 1 Pressure assisted sealing eliminates leaks and resists movement under pressure
- 2 Leak-tight seal prevents contamination of media and reduces scrap and test damage
- 3 Available in flow or cap versions
- 4 Quick and easy seal replacement to minimize down time, maintenance, and tool inventory

FN / INTERNAL SEALING CONNECTION TOOL

Internal thread grip and seal tool that uses threaded collets to grip threaded bores for high pressures.

AVAILABLE RANGE: 1/8" to 7/8" (3.175mm to 22.225mm) Threads



- 1** Pressure assisted grip and proprietary design locks the connector securely in the port, even when used in dynamic hydraulic applications
- 2** Instant threaded sealing connection up to 5,000 psig without tape, sealant, or wrenches - significantly reduces process time
- 3** Split collet design locks securely and will not damage threaded ports
- 4** Self aligning connector requires no operator adjustment
- 5** Quick and easy seal replacement to minimize down time, maintenance and tool inventory


SPECIFICATIONS

| Pressure Rating | Operating Temperatures | Materials of Construction |
|------------------------------|-----------------------------------|--|
| Vacuum to 5000 psi (345 bar) | -40°F to +250°F (-40°C to +121°C) | Anodized Aluminum, Stainless Steel, Potted PCA |
| Termination Port | | Seal Material* |
| BSPP (G) or FNPT | | Buna-N |

*Additional seal material types available, consult factory.
 ** Operating Temp: 32°F-100°F (0°C-38°C) for ICON™.

i Side load rating varies depending on size and insertion.

ACTUATION OPTIONS

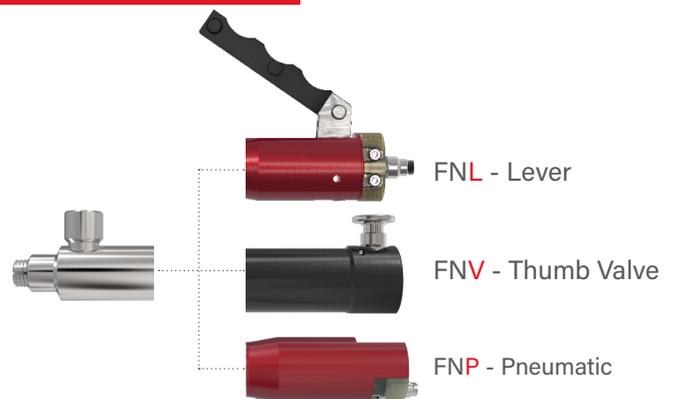

ICON™ TECHNOLOGY



For part numbers or additional product information:
 Contact fastsales@fastestinc.com



ICON™

INTELLIGENT CONNECTION TECHNOLOGY

FasTest's ICON™ adds sensing capabilities to our mechanical Sealing Connection Tools. ICON™ Tools include instant LED visual feedback and data output to improve sealing connection accuracy, maximize production efficiency, and optimize maintenance.



ICON™ features:



SURE SEAL™

Instant LED feedback verifies a good connection prior to starting a test.



SEAL LIFE™

Alert when the main seal is at end of life and must be replaced.

» Improve safety during functional tests.

SURE SEAL™ provides an instant LED indication of a safe and secure connection. Identify short-connects before media is introduced to prevent spills.

» Eliminate leak test false failures to improve first pass yield.

With ICON™, if the product fails a test, the connections should not be a source of leaks.

» Increase throughput and reduce downtime.

Safe, reliable, and consistent connections every cycle - test more, quicker. Reduce rework and the need to retest.

» Collect tool data.

Gather data on historical use, actuations, and cycle count to get better testing results.

» Optimize seal maintenance.

SEAL LIFE™ indicates when the main seal needs to be replaced.

**Product
Accessories**

Charge Valve



- Use with Charge Coupler to pressure up and hold pilot charge when an affixed airline is not useable
- Manually actuate pneumatic sealing connection tools

| Part Number | Termination |
|-------------|--------------------|
| ADM06102 | 1/8 NPT (standard) |
| ADM06502 | 1/8 BSPP |
| ADM06M5 | M5 |
| ADM061032 | 10-32 |

Charge Coupler PN: ADF05102



- Used with Charge Valve to introduce pressure without latching
- Internally valved
- Thread type: 1/8 NPT

Slide Valve PN: AV1021022



- Used to pressurize and exhaust pilot pressure for manual operation
- Thread type: 1/8 NPT

ICON™ Accessories

Programming Tool

- Quickly program / calibrate ICON™ Sealing Connection Tools
- Eliminate the need for PLC programming
- LED connection status visual feedback
- Powered from wall adapter (included) or from a PLC (24VDC)

| Part Number | Input Signal | Output Signal | Current Limit |
|-------------|--------------|---------------|-----------------|
| SPCT0204 | SSR | SSR | max 100 mA load |
| SPCT0204A | SSR | N/A | N/A |

Green LED indicates good connection



M8 Cable PN: SPCAFS0602AMS06



- Straight Female M8 threaded Connector to straight Male M8 connector (6-wire 2m cable)

M8 Cable PN: SPCAFS0602C



- Straight Female M8 to Flying Leads (6-wire 2m cable)

FASTEST GLOBAL DISTRIBUTION NETWORK



Application Experts



Quality Improvement



Standard and Customs



Intelligent Tools



FASTEST®

Designed in the U.S.A.

Headquarters | USA

1646 Terrace Drive, Roseville, MN, 55113-1317

Phone: 651.645.6266 • Fax: +1.651.645.7390 • www.fastestinc.com

Shenzhen | China

Room#1013,1015, A9 Building, Tianrui Industrial Park

No.35 Fuyuan 1st Road, FuHai residential district,

Baoan Shenzhen, China 518103

(755) 27084905 • fastsalescn@fastestusa.cn