


G350 / HYDROGEN

Bail handle actuated external connector for compressed gas processing



- 1 Positive pressure safety latch to prevent removal under pressure
- 2 Instant connection to external thread with self-aligning internal floating piston for robust sealing
- 3 Ergonomic bail handle surrounds valve for added safety
- 4 Materials optimized for use with high pressure hydrogen. High purity piston seal allows for use in specialty gas applications

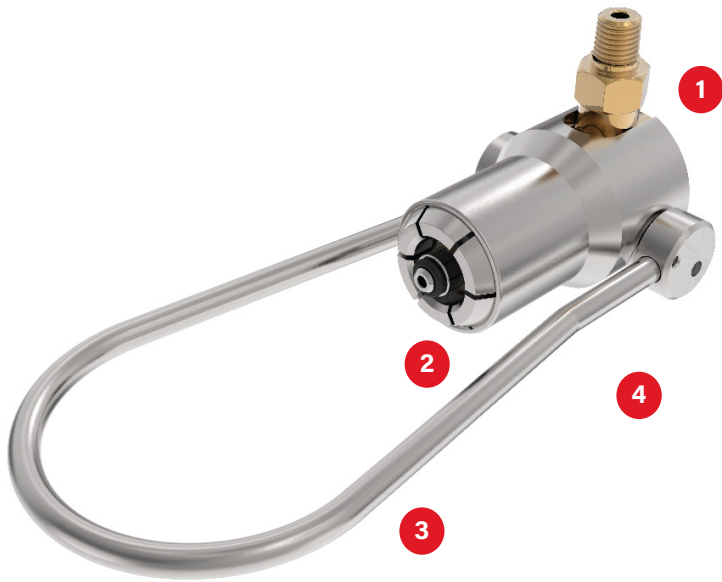

SPECIFICATIONS

Pressure Rating*	Wetted Materials
Vacuum to 3600 psi (248 bar)	Brass, 300 series SST
Operating Temperatures	Seal Materials
0°F to 140°F (-17°C to +60°C)	Teflon, FKM
Termination	Other Materials
1/4 Male NPT	Brass, 300 series SST



NOTE: Cleaned for oxygen service
*Pressure rating per criteria of ASME B31.3.

HANDLE OPTIONS

Bail Handle, Cable Handle, Lever Handle

ACTUATION METHOD

Bail/Cable/Lever: Rotate handle with roller actuation.

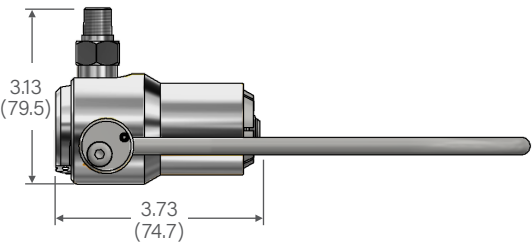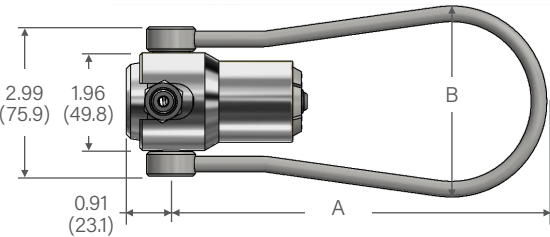

ORDERING INFORMATION

Part ID's	G3500411BH (CGA 350 #1 BAIL HANDLE) G3500414CH (CGA 350 #4 CABLE HANDLE)
-----------	---

Main Seal Kit Part ID's (Qty) / Material	SG350 (5) / FKM SG350100 (100) / FKM
--	---

Other configurations are available upon request. Please consult factory.

HOW TO ORDER

Request A Quote
Visit: www.fastestinc.com/en/applicationevaluation

Contact A FasTest Representative
Email: fastsales@fastestinc.com