

# G540 WOB / COMPRESSED GAS CONNECTOR


Bail handle actuated external grip and seal connection tool for compressed gas processing applications.

**CONNECTS TO:**

CGA 540 Valves

**GAS TYPE**

Oxygen

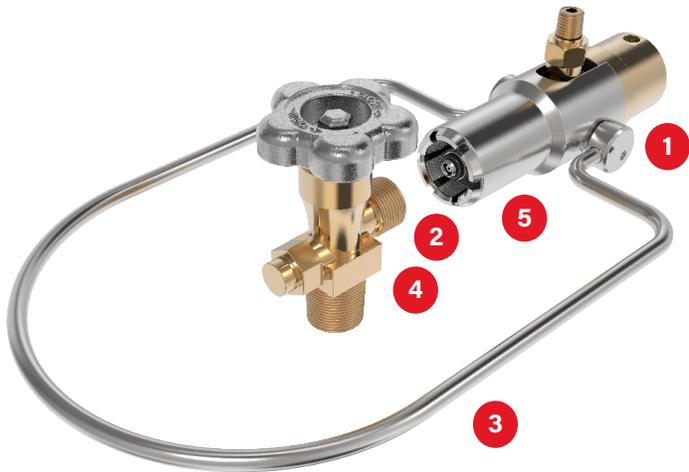

**SPECIFICATIONS**

Pressure Rating*	Wetted Materials
Vacuum to 3600 psi (248 bar)	Brass, Monel
Operating Temperatures	Seal Materials
0°F to 140°F (-17°C to +60°C)	Teflon, See Chart
Termination	Other Materials
1/4 Male NPT	Brass, 300 series SST

**NOTE:** BAM Tested. Cleaned for oxygen service  
 \* Pressure rating per criteria of ASME B31.3.

- 1** Positive pressure safety latch to prevent removal under pressure
- 2** Instant connection to external thread with self-aligning internal floating piston for robust sealing
- 3** Ergonomic bail handle surrounds valve for added safety
- 4** Cannot overtighten and ruin valves
- 5** RPV pin fully retracts to prevent damage


**HANDLE OPTIONS**

Bail Handle

**ACTUATION METHOD**

Bail: Rotate handle with roller actuation.  
 Pneumatically activated RPV pin depression

## G540 WOB / COMPRESSED GAS CONNECTOR

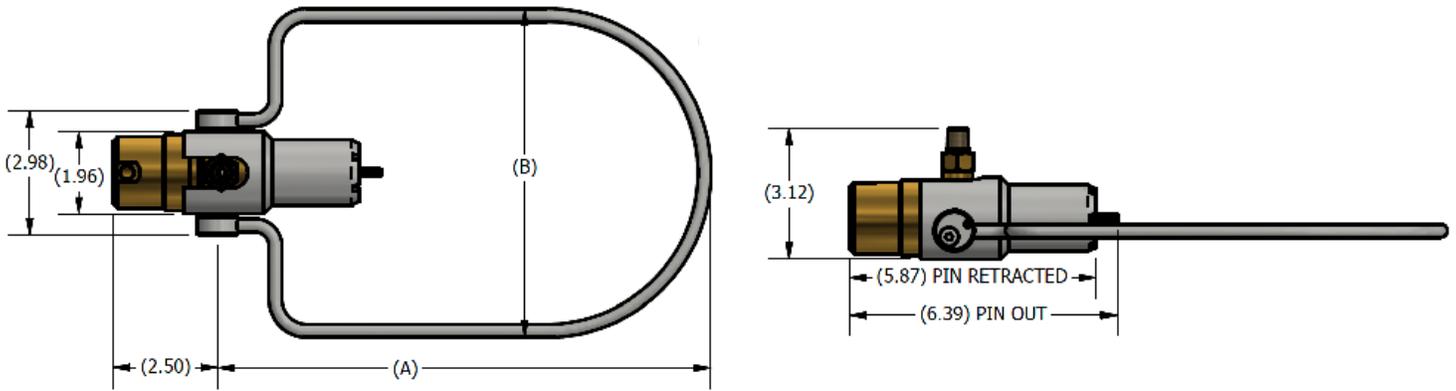

Ordering Information							Dimensions	
Connects To	Gas Type	Part Number	Handle Type	RPV Pin (Y/N)	Main Seal Material	Main Seal Packs (QTY)	A	B
<b>CGA 540</b>   G-Series 540 WOB								
CGA 540	Oxygen	G5400415WOB	5B	Y	FKM	SG540 (5)	11.60 (294.6)	781 (198.4)
		G5400418WOB	8C	Y		SG540100 (100) SG540250 (250) SG540500 (500)		

Dimensions: inch (mm)

