


HPG350 / HYDROGEN

Bail handle actuated external connector for compressed gas processing

Connects to: CGA 350 Valves

Gas Type: Hydrogen

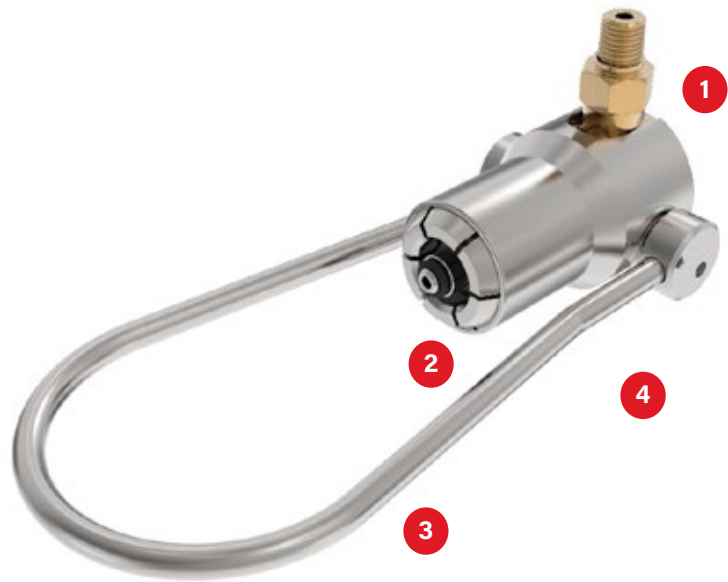

SPECIFICATIONS

Pressure Rating*	Wetted Materials
Vacuum to 3600 psi (248 bar)	Brass, 300 series SST
Operating Temperatures	Seal Materials
0°F to 140°F (-17°C to +60°C)	Teflon, FKM
Termination	Other Materials
1/4 Male NPT	Brass, 300 series SST

NOTE: Cleaned for oxygen service
*Pressure rating per criteria of ASME B31.3.



HANDLE OPTIONS

Bail Handle, Cable Handle, Lever Handle

ACTUATION METHOD

Bail/Cable/Lever: Rotate handle with roller actuation.

- 1 Positive pressure safety latch to prevent removal under pressure
- 2 Instant connection to external thread with self-aligning internal floating piston for robust sealing
- 3 Ergonomic bail handle surrounds valve for added safety
- 4 Materials optimized for use with high pressure hydrogen. High purity piston seal allows for use in specialty gas applications

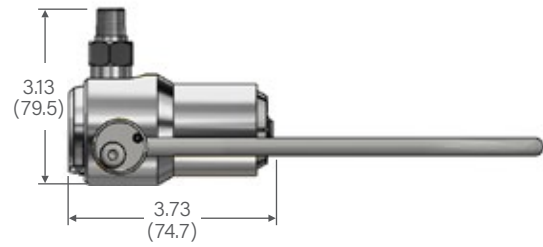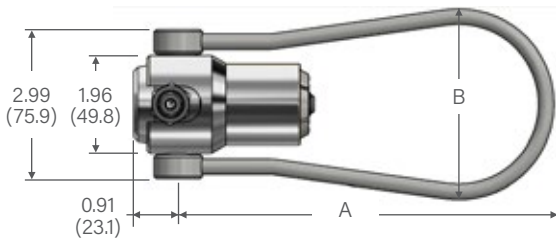

ORDERING INFORMATION

Part ID's

HPG35004110CHV (CGA 350 #10 CABLE HANDLE)
 HPG3500411CHV (CGA 350 #1 CABLE HANDLE)
 HPG3500411BHV (CGA 350 #1 BAIL HANDLE)
 HPG3500412BHV (CGA 350 #2 BAIL HANDLE)
 HPG3500419CHV (CGA 350 #9 CABLE HANDLE)

Main Seal Kit Part ID's (Qty) / Material

SG350 (5) / FKM
 SG350100 (100) / FKM

General Maintenance

G5XSPKV (STOP PIN KIT)

Other configurations are available upon request. Please consult factory.

HOW TO ORDER

Request A Quote

Visit: www.fastestinc.com/en/applicationevaluation

Contact A FasTest Representative

Email: fastsales@fastestinc.com