FEG / EXTERNAL SEALING CONNECTION TOOL

Pneumatic sealing connection tool with gripping cradle for manual operated processes.


CONNECTS TO:

Turbos



Flanged



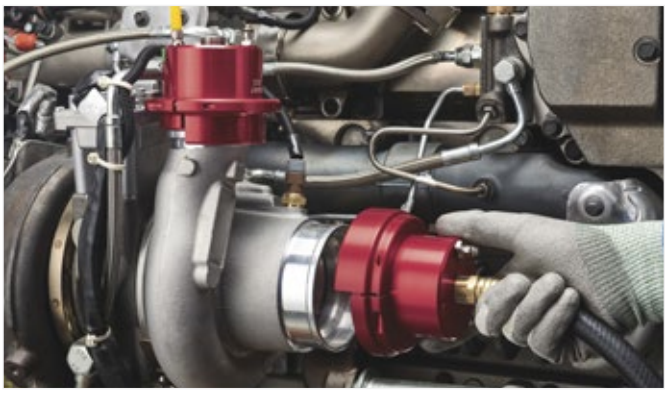



SPECIFICATIONS

Pressure Rating	Pilot Pressure	Operating Temperatures
Determined by Application Consult Factory	Determined by Application *Consult Factory*	-40°F to +250°F (-40°C to +121°C)

Termination Port	Materials of Construction	Seal Material*
NPT (Determined by Application Consult Factory)	Anodized Aluminum, Stainless Steel, Potted PCA	Standard: FasTest Buna-N, FasTest Urethane Optional: FKM, Neoprene®, EPDM, FDA White Neoprene®

* Additional seal material types available, consult factory.

** Operating Temp: 32°F-100°F (0°C-38°C) for Intelligent Connection Technology.

ICON™ - INTELLIGENT CONNECTION TECHNOLOGY

SURE SEAL™

1. Gripping cradle minimizes the need for fixturing
2. Improved safety by preventing the tool from accidental release under pressure
3. Consistent sealing force with pneumatic actuation
4. Optimized for operator-applied applications such as turbos and flanged ports
5. ICON™ capable - addtional sensing capabilities and visual feedback

ACTUATION METHOD

Pneumatic: Pilot pressure creates uniform seal movement and consistent sealing force.

ACCESSORIES VISIT FASTESTINC.COM

FEG / EXTERNAL SEALING CONNECTION TOOL







Ordering Information		Dimensions				
Sealing Range	Part Number	A	B	M	P	T
Determined by Application Consult Factory	Determined by Application Consult Factory	Determined by Application Consult Factory				

ⓘ Secondary safety measures are advisable when tools are under pressure to protect the operator.