


**ZF Sleeve actuated Connection Tool, 0.44 to 0.52in (11.18-13.21mm) sealing range, 300psi (20.7bar) pressure, 1/4 NPT Female termination, Anodized Aluminum construction with Buna-N, Neoprene seal materials.**

SKU: ZF3

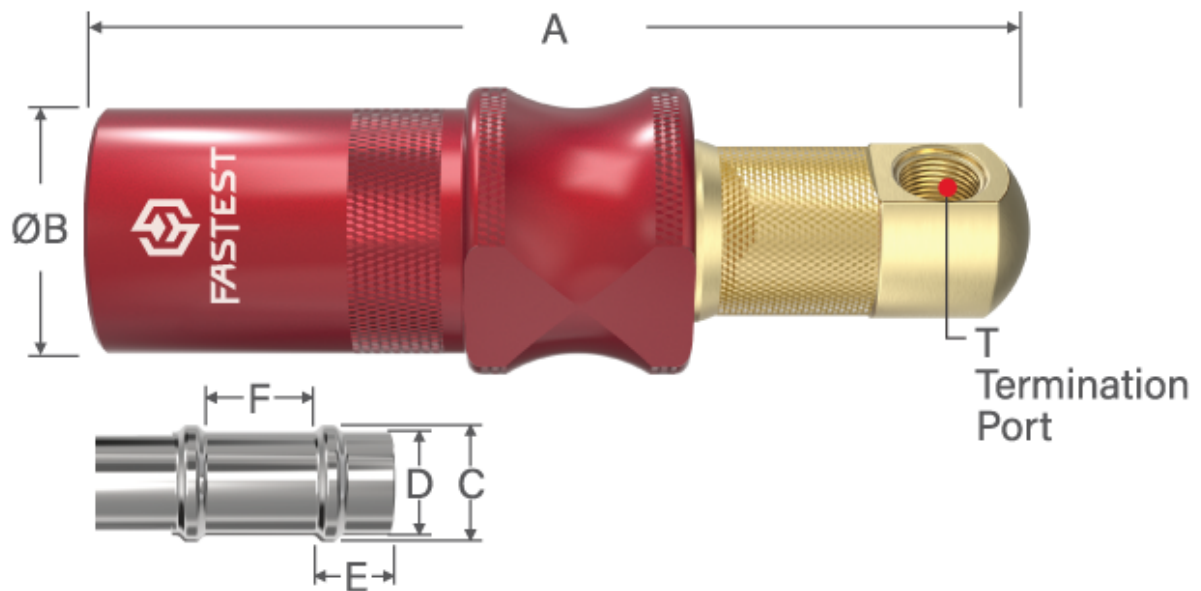

- \*C Dimension Represents Bead Diameter
- \*D Dimension Represents Sealing Diameter

**Actuation:** Sleeve

**Bead Diameter Range:** 0.49-0.58in (12.45-14.73mm)

**Pressure Rating:** 300psi (20.7bar)

**Vacuum Rating:** Vacuum

**Leak Rate Capability:** 1E-3cc/s He

**Connection / Application Method:** Manual

**Grip Method:** Grip Collets



**Dim A:** 4.96in (125.98mm)

**Dim B:** 1.23in (31.24mm)

**Min./Max. Bead Depth (Dim E):** 0.13in/0.32in (3.3mm/8.1mm)

**Minimum Clearance (Dim F):** 0.31in (7.9mm)

**Termination Port (T):** 1/4 NPT

**Max Termination Torque:** 14ft-lbs (19N-m)