


ZN Lever actuated Connection Tool, 0.47 to 0.55in (11.94-13.97mm) sealing range, 50psi (3.4bar) pressure, 1/8 NPT Female termination, SS, Anodized Aluminum, Acetal construction with Buna-N, Neoprene seal materials.

SKU: ZN112

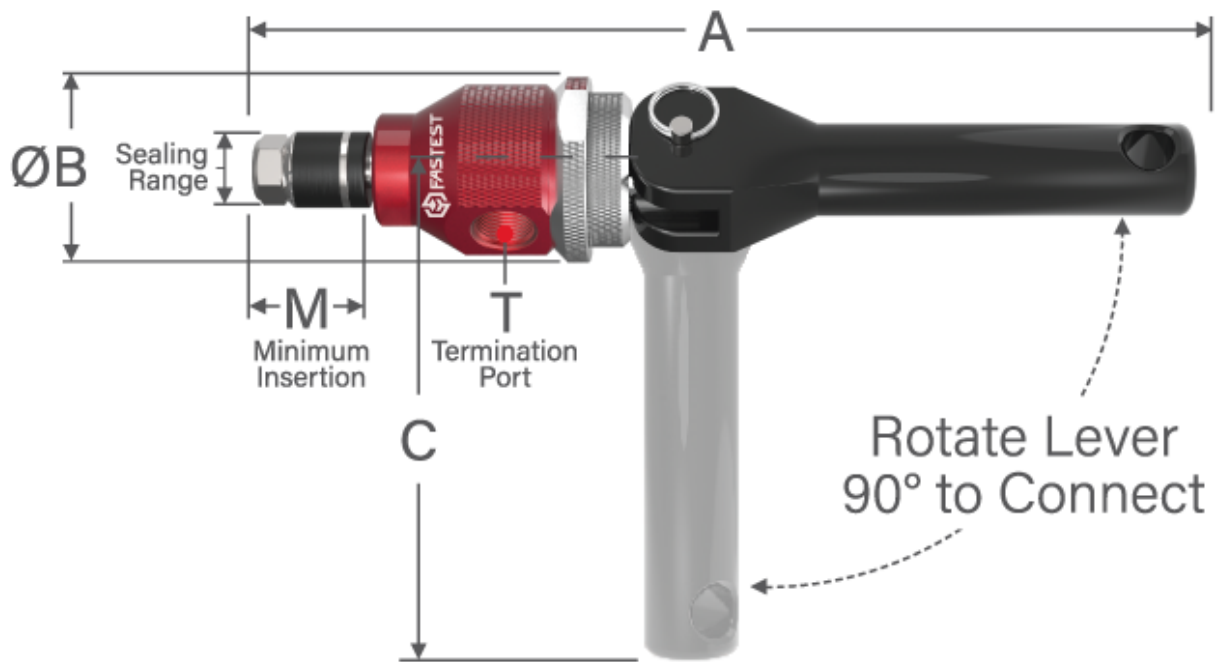

Actuation: Lever

Pressure Rating: 3.4bar (50psi)

Vacuum Rating: Vacuum

Leak Rate Capability: 1E-5cc/s He

Connection / Application Method: Manual

Grip Method: Seal Friction



Dim A: 185.42mm (7.3in)

Dim B: 30.48mm (1.2in)

Dim C: 103.89mm (4.09in)

DIM M - Insertion Depth: 14.48mm (0.57in)

Termination Port (T): 1/8 NPT

Max Termination Torque: 11N-m (8ft-lbs)