




MLH actuated Connection Tool for; Luer , 500psi (34.5bar) pressure, 10-32 UNF Female termination, Anodized Aluminum construction with FDA FKM seal materials.

SKU: MLH2001

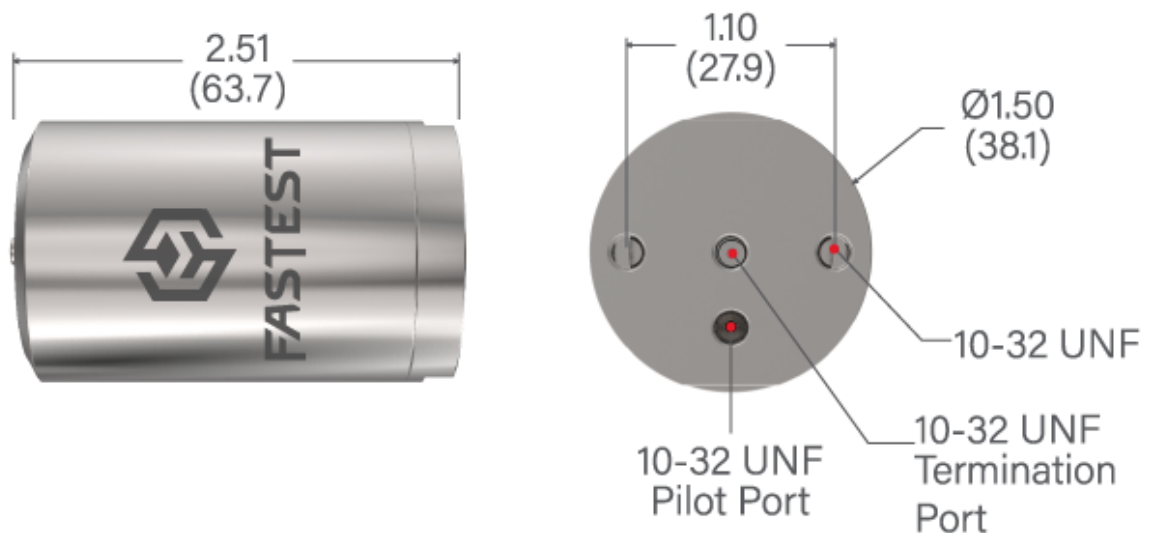

Actuation: Pneumatic

Pressure Rating: 34.5bar (500psi)

Vacuum Rating: Vacuum

Leak Rate Capability: 1E-5cc/s He

Connection / Application Method: semi-automated or fully automated

Grip Method: Grip Nest

Dim A: 38.1mm (2.51in)



Dim B: 38.1mm (1.5in)

Termination Port (T): 10-32 UNF

Pilot Pressure: 6.9bar (100psi)

Pilot Port Termination (P): 10-32 UNF

Max Termination Torque: 3.5N-m (2.5ft-lbs)

Mounting Hole Size: 10-32 UNF