




ME Pneumatic actuated Connection Tool, 0.015 to 0.03in sealing range, 500psi (34.5bar) pressure, 1/8 NPT Female termination, Anodized Aluminum construction with FDA FKM seal materials.

SKU: ME0010030

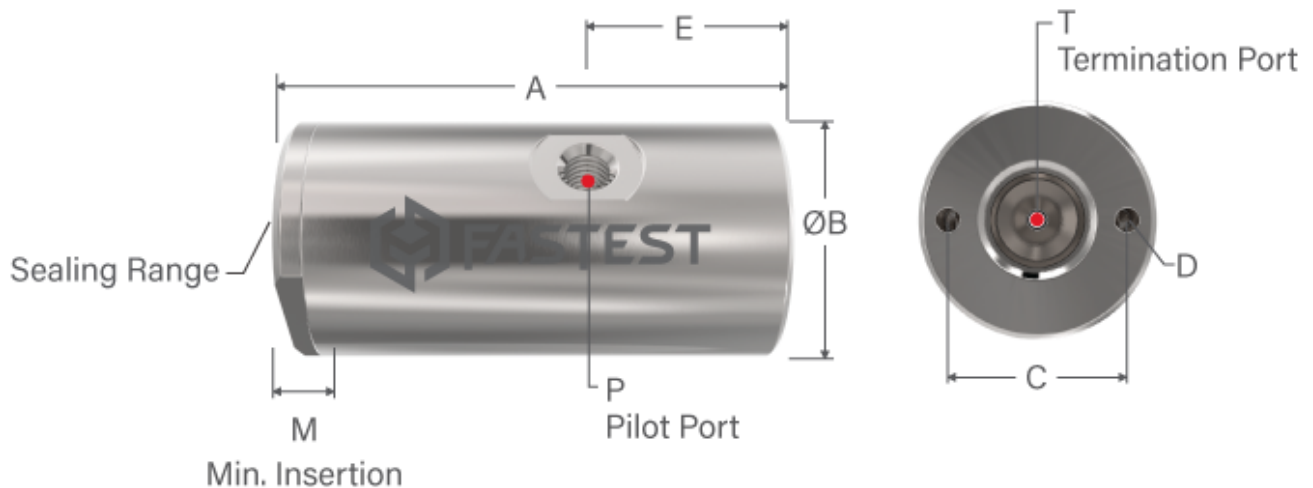

Actuation: Pneumatic

Pressure Rating: 500psi (34.5bar)

Vacuum Rating: 10millitorr

Leak Rate Capability: 1E-5cc/s He

Connection / Application Method: semi-automated or fully automated

Grip Method: Fixturing/Seal friction

Dim A: 1.72in (43.7mm)



Dim B: 0.84in (21.3mm)

Dim C: .63in (16mm)

Dim D: 4-40 UNC (mounting hole) (4-40 UNC (mounting hole))

Dim E: .72in (18.3mm)

DIM M - Insertion Depth: .16in (4.1mm)

Termination Port (T): 1/8 NPT

Pilot Pressure: 90psi (6.2bar)

Pilot Port Termination (P): 10-32 UNF

Max Termination Torque: 8ft-lbs (11N-m)

Mounting Hole Size: 4-40 UNC