


**FN Lever actuated Connection Tool for: 3/4 NPT, 3500psi (241.2bar) pressure, 3/4 NPT Female termination, SS, Anodized Aluminum construction with Buna-N seal materials.**

**SKU:** FNL122121

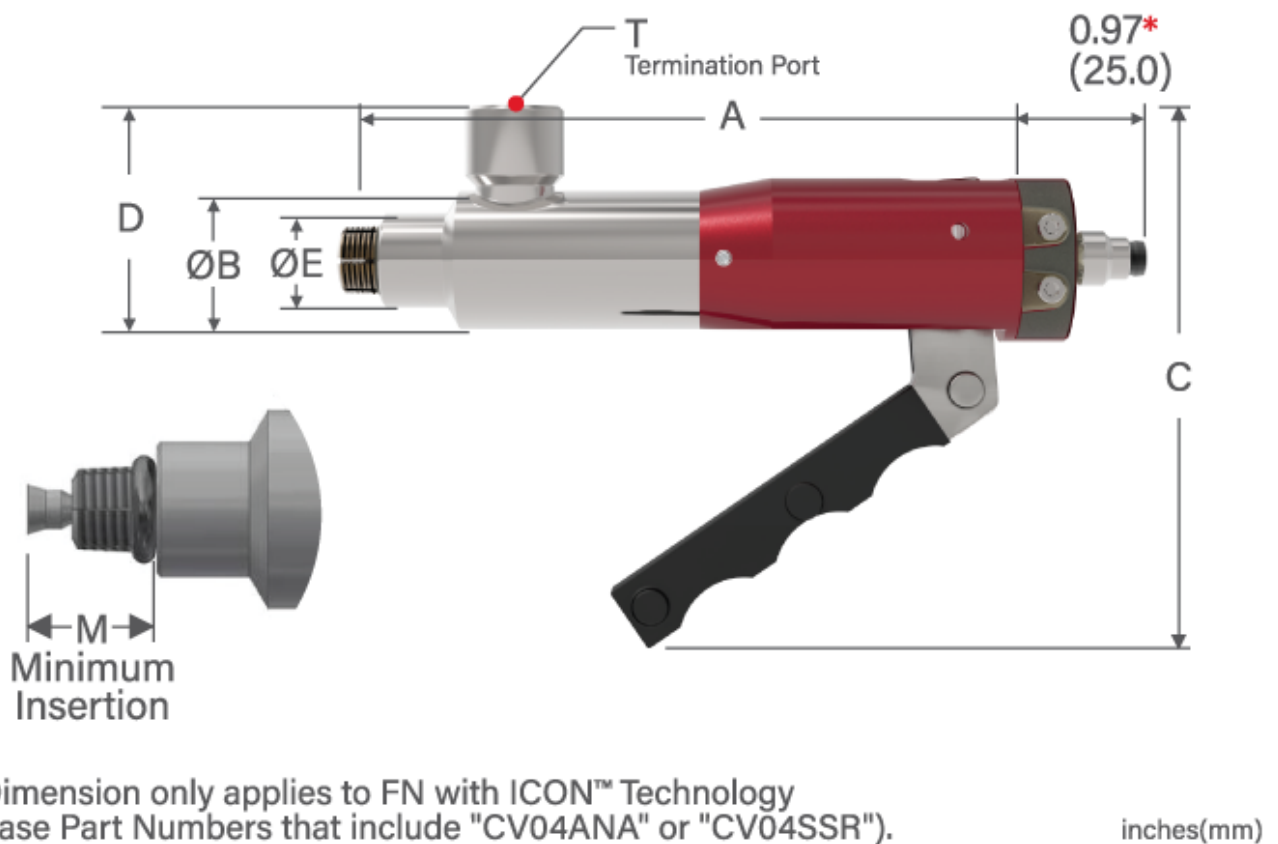

**Actuation:** Lever

**Pressure Rating:** 241.2bar (3500psi)

**Vacuum Rating:** Vacuum

**Leak Rate Capability:** 1E-5cc/s He

**Connection / Application Method:** Manual

**Grip Method:** Thread Collets

**Dim A:** 207.52mm (8.17in)



**Dim B:** 45.21mm (1.78in)

**Dim C:** 129.54mm (5.1in)

**Dim D:** 74.42mm (2.93in)

**Dim E:** 37.85mm (1.49in)

**DIM M - Insertion Depth:** 16mm (0.63in)

**Termination Port (T):** 3/4 NPT

**Max Termination Torque:** 62N-m (46ft-lbs)