


FN Lever actuated Connection Tool for: 1/4 BSPP (G) Shallow Port, 2500psi (172.3bar) pressure, 1/4 NPT Female termination, SS, Anodized Aluminum construction with Buna-N seal materials.

SKU: FNLR046041

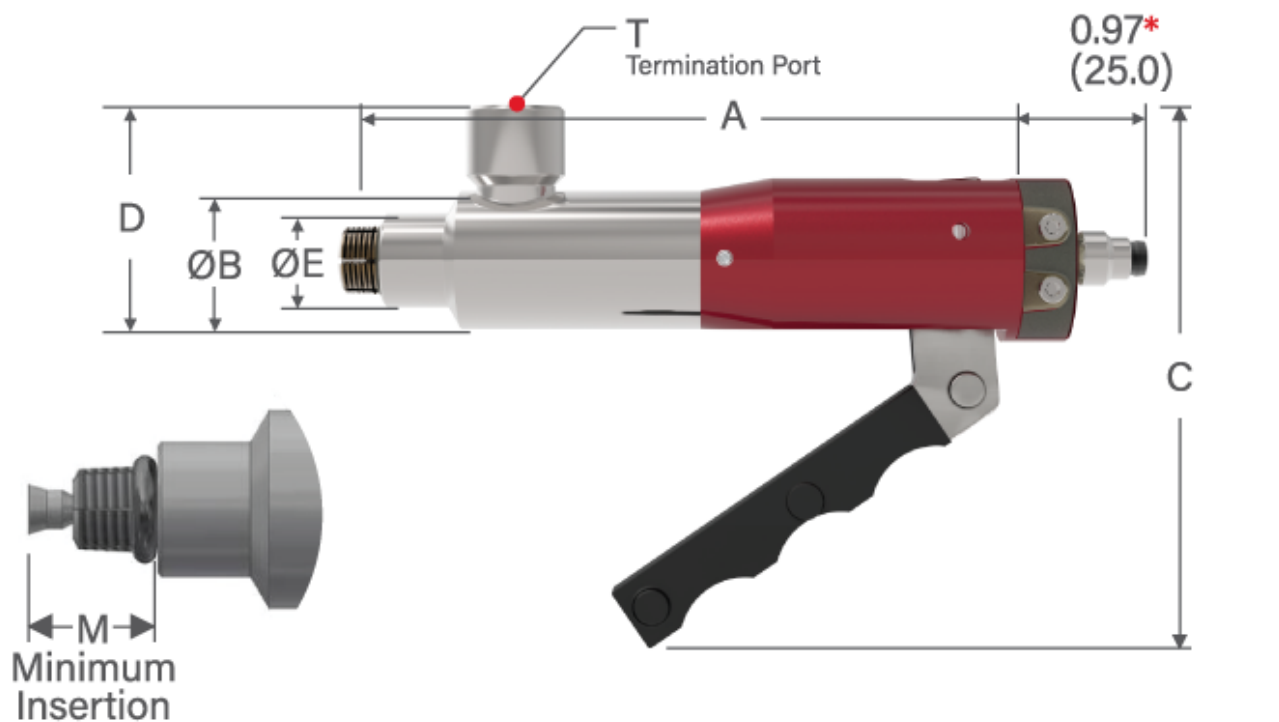

*Dimension only applies to FN with ICON™ Technology (Base Part Numbers that include "CV04ANA" or "CV04SSR").

inches(mm)

Actuation: Lever

Pressure Rating: 172.3bar (2500psi)

Vacuum Rating: Vacuum

Leak Rate Capability: 1E-5cc/s He

Connection / Application Method: Manual

Grip Method: Thread Collets

Dim A: 127mm (5in)



Dim B: 26.92mm (1.06in)

Dim C: 101.6mm (4in)

Dim D: 43.18mm (1.7in)

Dim E: 18.29mm (0.72in)

DIM M - Insertion Depth: 9.91mm (0.39in)

Termination Port (T): 1/4 NPT

Max Termination Torque: 28N-m (21ft-lbs)