

G60V / EXTERNAL GAS BURNER TESTING

Internally valved sleeve actuated external grip and seal connection tool for Natural Gas or Propane Burner Testing.

CONNECTS TO:

MNPT



SPECIFICATIONS

Pressure Rating	Operating Temperatures	Materials of Construction
Vacuum to 30 psi (2.1 bar)	0°F to +200°F (-17°C to +93°C)	Stainless Steel, Brass, Anodized Aluminum
Termination Port		Seal Material*
3/8, 1/2, 3/4 NPT		Main: Neoprene® Internal: Buna-N

* Additional seal material types available, consult factory.

ACTUATION METHOD

Manual Sleeve: Easy, ergonomic sleeve action eliminates repetitive twisting and turning - push to connect, pull to release

INTELLIGENT CONNECTION TECHNOLOGY


Consult Factory

ACCESSORIES

Visit fastestinc.com

- 1 SurConnect™ - Green to go visible indicator to ensure complete connection and internally valved to prevent gas flow once disconnected
- 2 Instant external threaded connection with floating piston to ensure proper face / ID sealing position
- 3 Collet design locks securely into external threads or behind the threads
- 4 Connect and seal to NPT male threads
- 5 Stainless steel components for demanding production environments - brass collets for non-sparking


G60V / EXTERNAL GAS BURNER TESTING

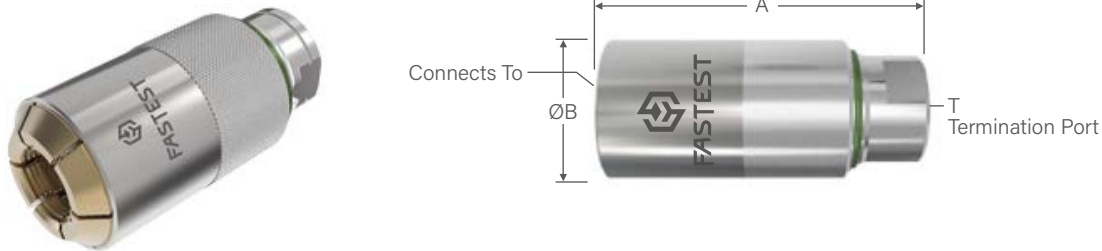

Ordering Information				Dimensions		
Connects To	Part Number	Replacement Seals Bulk Pack (5)	Rebuild Kit	A	B	T
3/8 NPT	G60V1T06	SZF4	G60VR06	3.11 (79.0)	1.38 (35.0)	3/8 NPT
1/2 NPT	G60V1T08	SZF5	G60VR08	3.31 (84.1)	1.58 (40.1)	1/2 NPT
3/4 NPT	G60V1T12	SZF7	G60VR12	3.54 (90.0)	1.78 (45.2)	3/4 NPT

Dimensions: inch (mm)

GasMate G60V Family Flow Capacity

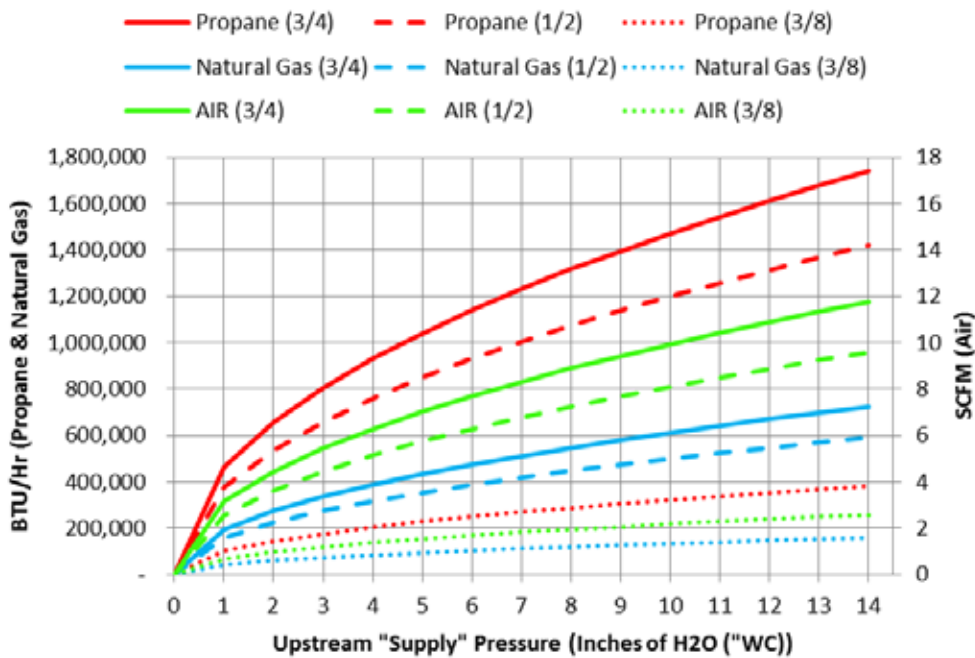

DON'T SEE A SOLUTION FOR YOUR APPLICATION? Submit a custom application form and drawing to fastsales@fastestinc.com or to your local distributor.